

# WAC LIGHTING

Responsible Lighting®





LED87





LED87S


## 24V LED Button Lights

**Recessed or Surface Mount with 24V transformer**

<b>Power:</b>	24V, 4.8W	<b>CRI:</b>	85
<b>Lumens:</b>	180 (round), 155 (square)	<b>Dimming:</b>	100% – 10% smooth and continuous ELV dimming
<b>Compares To:</b>	20W Xenon Bi-pin	<b>Rated Life:</b>	70,000 hours
<b>Color Temp:</b>	2700K, 3000K	<b>Cutout:</b>	2 1/8" for round recessed applications

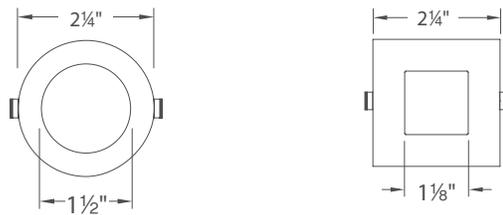

Model	Color temp	Finish
<b>HR-LED87-27</b>	Round	2700K
<b>HR-LED87S-27</b>	Square	2700K
<b>HR-LED87</b>	Round	3000K
<b>HR-LED87S</b>	Square	3000K
		<b>BK</b> Black
		<b>BN</b> Brushed Nickel
		<b>CB</b> Copper Bronze
		<b>CH</b> Chrome
		<b>DB</b> Dark Bronze
		<b>WT</b> White

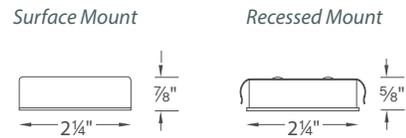

Same cutout for recessed applications, round or square

Example: **HR-LED87S-WT**  
Includes 6 foot lead wire

### Class 2 Electronic Transformers (Required)


Single transformer powers 20 button lights

- 1W minimum load



Type	Model	Input	Output	Power Up To	Dimensions
Remote	<b>EN-2460-RB2</b>	120V	24V AC/60W	12 × LED87	6 1/2" x 1 5/8" x 1 1/4"
	<b>EN-24100-RB2</b>	120V	24V AC/96W	20 × LED87	6 1/2" x 1 5/8" x 1 1/4"
Plug-In	<b>EN-2460-P-AR</b>	120V	24V AC/60W	12 × LED87	2 3/4" x 1 5/8" x 1 3/4"
Multiple terminal box	<b>MTB-01</b>				

Includes 6' cord and 5 SL-WC-1 clips.

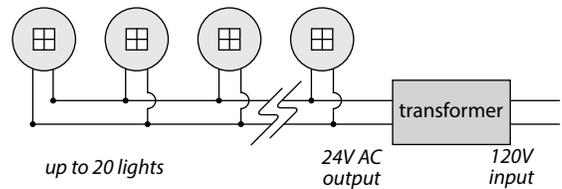

Minimizes wiring back to transformer

### Frosted Lens Accessory

Softens light and reduces glare for square or round

Model #

**LENS-13-FR**

### Retrofit Housing

Use to replace HR-88 and HR-86 using existing wiring and cutout, LEDme® Button light not included.

Model #

Finish

<b>HR-LED-COV</b>	<b>BK</b>	Black
	<b>BN</b>	Brushed Nickel
	<b>CB</b>	Copper Bronze
	<b>CH</b>	Chrome
	<b>DB</b>	Dark Bronze
	<b>WT</b>	White

Example: **HR-LED-COV-BK**

