


Submittal

Variable Speed Air Handlers with Epoxy Coated Coil 3.5 — 5 Ton

5TAMXD06AV41DA

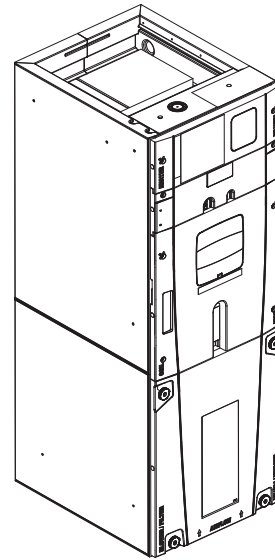

The Diagnostics Mobile App is available by scanning a QR code located inside this unit or by searching for the Link Diagnostics App in your App Store.


Note: "Graphics in this document are for representation only. Actual model may differ in appearance."

Note: For use with BAYEA series heaters ONLY.

Note: This unit can be used in Link Communicating mode or 24 volt mode.

Note: Need to use Diagnostics App to configure blower delays and accessories etc., in 24 volt mode.

Outline Drawing

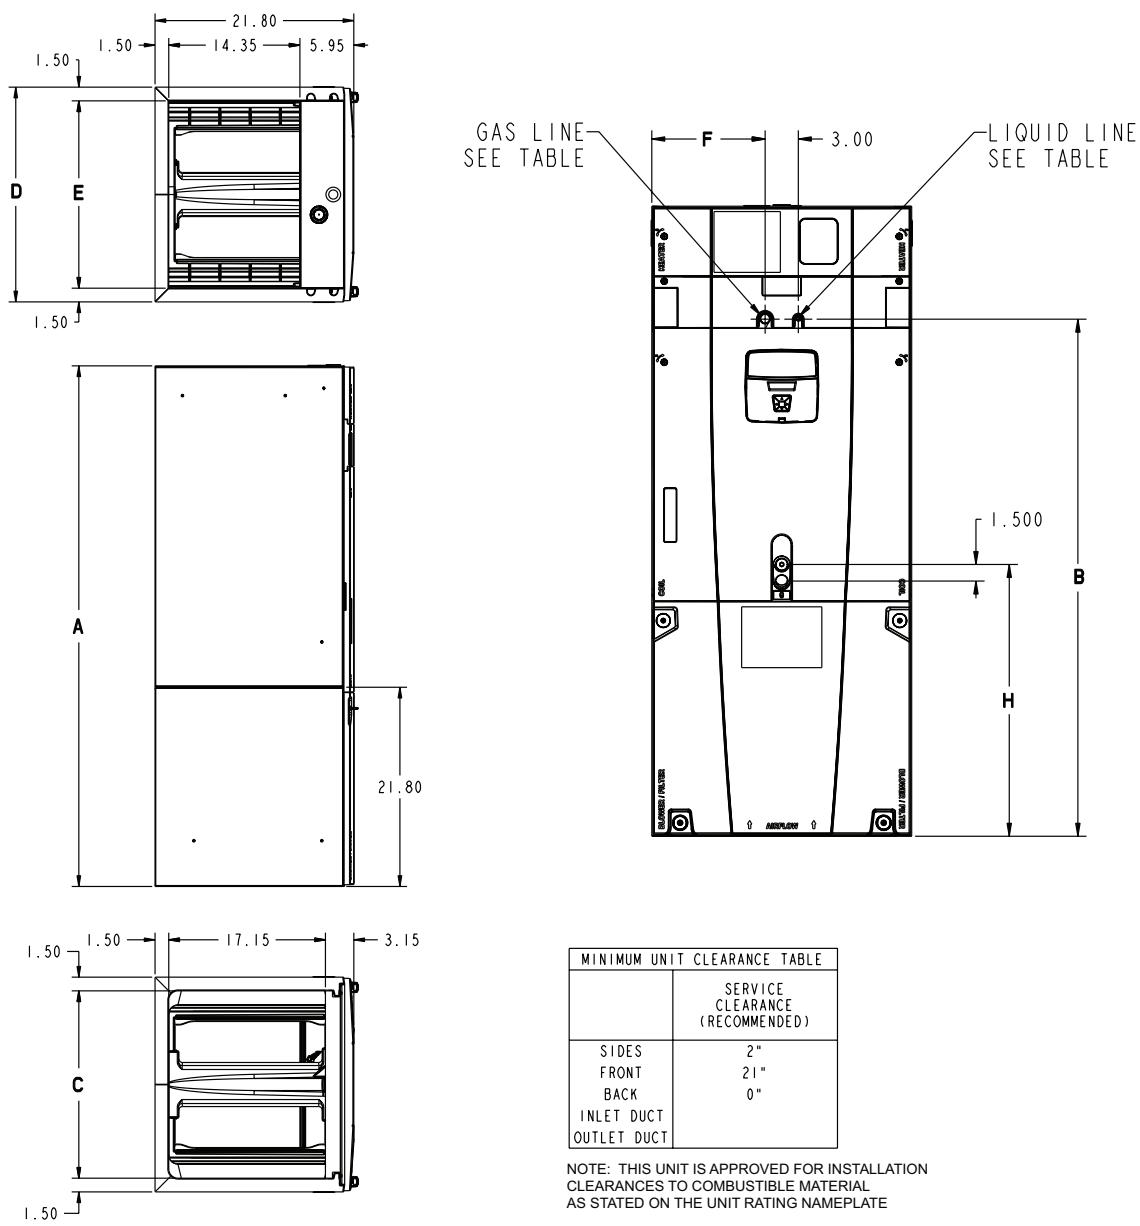

Model Number	A	B	C	D	E	F	H	FLOW CONTROL	GAS LINE BRAZE	LIQ LINE BRAZE
5TAMXD06AV41DA	61.7	51.5	20.5	23.5	20.5	10.3	24.9	EEV	7/8	3/8

Product Specifications

MODEL	5TAMXD06AV41DA
Family Description	R-454B Variable Speed Air Handler with Epoxy Coated Coil
Description	R-454B Variable Speed Air Handler with Epoxy Coated Coil, Epoxy Coated All-Aluminum Plate Fin Coil, 4-Way Poise, Link Communicating or 24V System Control, 208-230/1/60, 42K - 60K BTUH Capacity
Application Configuration	4-Way
RATED CAPACITY RANGE (BTUH)	42K - 60K
SYSTEM CONTROL TYPE	Link Communicating or 24V
POWER CONN. - V/PH/HZ	208-230/1/60
Max Breaker Size, Without Electric Heater (Amps)	15
Max Breaker Size, With Electric Heater (Amps) ^(a) ^(b)	60
Name Plate	See the name plate
COIL TYPE	Epoxy Coated All-Aluminum Plate Fin
Refrigerant Type	R-454B
Refrigerant Control	EEV
Refrigerant Line Connection - Gas (in.)	7/8
Refrigerant Line Connection - Liquid (in.)	3/8
BLOWER TYPE	Direct Drive Centrifugal
Configuration	Blow Through
Dimensions (Diameter x Width (in.))	11 x 10
Motor Type	Variable Speed
Nominal CFM ^(c)	1600
Speed (RPM)	1050
Volts/Ph/Hz	208-230/1/60
Full Load Amps	5.7
FILTER RACK (YES, NO)	Yes
Dimensions (Length x Width (in.))	22 x 20 x 1
DUCT CONNECTIONS	L x W
Supply (in.)	20.5 x 14.35
Return (in.)	20.5 x 17.15
DRAIN CONN. SIZE (IN.)	3/4 NPT
DIMENSIONS	H x W x D
Uncrated (in.)	61-3/4 x 23-1/2 x 21-3/4
Crated (in.)	63-1/4 x 27-1/2 x 25-3/4
WEIGHT - SHIPPING/NET (LBS.)	176/166

^(a) Maximum overcurrent protection is dependent on which electric heater is installed. See Installation, Operation, and Maintenance manual or unit name plate.

^(b) For CFM versus external static pressure (in. w.c.), refer to Installation, Operation, and Maintenance manual.

^(c) If installing system outside of the United States, accessory electric heaters may not be installed.

Heater Attribute Data

Note: Heater size will be announced when using the resistor that is being provided with the BAYEA heater. Heater can also be configured in the UX360 User Interface or Diagnostics Mobile App.

5TAMXD06AV41DA											
Heater Model No.	No. of Circuits	240 Volt					208 Volt				
		Capacity		Heater Amps per Circuit	Minimum Circuit Ampacity	Maximum Overload Protection	Capacity		Heater Amps per Circuit	Minimum Circuit Ampacity	Maximum Overload Protection
		kW	BTUH				kW	BTUH			
No Heater	0	-	-	5.7 **	7	15	-	-	5.7 **	7	15
BAYEA(13/AC)04++1	1	3.84	13100	16.0	27	30	2.88	9800	13.8	24	25
BAYEA(13/AC)05++1	1	4.80	16400	20.0	32	35	3.60	12300	17.3	29	30
BAYEA(13/AC)08++1	1	7.68	26200	32.0	47	50	5.76	19700	27.7	42	45
BAYEA(13/AC)10++1	1	9.60	32800	40.0	57	60	7.20	24600	34.6	50	50
BAYEA(13/AC)10LG3	1-3 PH	9.60	32800	23.1	35	40	7.20	24600	20.0	31	35
BAYEA(23/BC)15LG3	1-3 PH	14.40	42000	34.6	50	60	10.80	36900	30.0	44	45
BAYEA(23/BC)15BK1 - Circuit 1 (a) BAYEA(23/BC)15BK1 - Circuit 2	2	9.60	32800	40.0	57	35	7.20	24600	34.6	50	50
		4.80	16400	20.0	25	50	3.60	12300	17.3	22	25
BAYEA(23/BC)20BK1 - Circuit 1 BAYEA(23/BC)20BK1 - Circuit 2	2	9.60	32800	40.0	57	60	7.20	24600	34.6	50	50
		9.60	32800	40.0	50	50	7.20	24600	34.6	43	45
BAYEA(33/CC)25BK1 — Circuit 1 BAYEA(33/CC)25BK1 — Circuit 2 BAYEA(33/CC)25BK1 — Circuit 3	3	9.60	32800	40.0	57	60	7.20	24600	34.6	50	50
		9.60	32800	40.0	50	50	7.20	24600	34.6	43	45
		4.80	16400	20.0	25	25	3.60	12300	17.3	22	25

Note: ** Motor Amps

(a) MCA and MOP for circuit 1 contains the motor amps

Note: See Product Data or Air Handler nameplate for approved combinations of Air Handlers and Heaters.

Note: Heater model numbers may have additional suffix digits.

5TAMX Air Flow Performance Tables

5TAMXD06AV41DA AIRFLOW PERFORMANCE CONSTANT CFM MODE / CONSTANT TORQUE MODE													
OUTDOOR MULTIPLIER (TONS)	COOLING AIRFLOW SETTING	AIRFLOW POWER	EXTERNAL STATIC PRESSURE (Constant CFM / Constant Torque)				HEATING AIRFLOW SETTING	AIRFLOW POWER	EXTERNAL STATIC PRESSURE				
			0.1	0.3	0.5	0.7	0.9		0.1	0.3	0.5	0.7	0.9
3 tons	290 CFM/ton	CFM Watts	894 / 1018 69 / 91	900 / 897 114 / 114	896 / 767 157 / 130	886 / 622 195 / 137	871 / 445 229 / 136	CFM Watts	893 72	900 118	893 159	883 197	864 230
	350 CFM/ton	CFM Watts	1067 / 1180 106 / 132	1073 / 1078 158 / 160	1072 / 972 208 / 180	1065 / 859 252 / 192	1053 / 738 292 / 194	CFM Watts	1068 112	1073 164	1070 213	1062 257	1049 295
	400 CFM/ton	CFM Watts	1205 / 1314 145 / 176	1212 / 1222 203 / 206	1213 / 1128 259 / 229	1208 / 1029 309 / 244	1199 / 926 354 / 249	CFM Watts	1207 154	1212 212	1212 266	1206 315	1196 359
	450 CFM/ton	CFM Watts	1343 / 1451 193 / 232	1352 / 1367 259 / 264	1355 / 1280 320 / 289	1353 / 1190 377 / 305	1346 / 1098 427 / 313	CFM Watts	1344 206	1352 270	1354 331	1352 387	1344 436
	290 CFM/ton	CFM Watts	1034 / 1149 98 / 123	1041 / 1044 149 / 150	1038 / 934 197 / 170	1031 / 817 240 / 181	1018 / 690 279 / 182	CFM Watts	1034 103	1040 154	1037 202	1028 244	1014 281
3.5 tons	350 CFM/ton	CFM Watts	1228 / 1336 152 / 185	1235 / 1246 212 / 215	1236 / 1153 268 / 238	1232 / 1056 319 / 253	1224 / 955 365 / 259	CFM Watts	1229 162	1235 221	1236 276	1230 326	1220 371
	400 CFM/ton	CFM Watts	1389 / 1498 212 / 253	1399 / 1415 280 / 286	1403 / 1331 343 / 311	1401 / 1244 402 / 328	1395 / 1154 455 / 336	CFM Watts	1392 226	1400 293	1403 356	1400 413	1394 465
	450 CFM/ton	CFM Watts	1558 / 1669 290 / 343	1570 / 1592 367 / 377	1575 / 1514 439 / 404	1575 / 1434 505 / 422	1568 / 1351 563 / 432	CFM Watts	1561 310	1572 386	1576 457	1574 521	1567 577
	290 CFM/ton	CFM Watts	1168 / 1298 133 / 170	1175 / 1205 191 / 200	1175 / 1109 244 / 223	1170 / 1010 293 / 237	1160 / 905 336 / 242	CFM Watts	1168 141	1176 198	1174 251	1168 299	1157 341
	350 † CFM/ton	CFM Watts	1389 / 1517 212 / 262	1399 / 1436 280 / 295	1403 / 1352 343 / 321	1401 / 1266 402 / 338	1395 / 1177 455 / 346	CFM Watts	1392 226	1400 293	1403 356	1400 413	1394 465
4 tons †	400 CFM/ton	CFM Watts	1583 / 1714 303 / 370	1595 / 1639 382 / 546	1601 / 1562 455 / 431	1600 / 1483 521 / 450	1593 / 1401 580 / 459	CFM Watts	1586 325	1597 402	1601 474	1599 538	1591 595
	450 CFM/ton	CFM Watts	1790 / 1918 429 / 511	1800 / 184 8515 / 546	1808 / 1775 594 / 573	1793 / 1701 663 / 592	1698 / 1625 660 / 601	CFM Watts	1794 459	1801 544	1800 620	1766 665	1667 655
	290 CFM/ton	CFM Watts	1301 / 1429 177 / 222	1310 / 1344 241 / 253	1312 / 1256 300 / 278	1309 / 1165 355 / 294	1302 / 1071 404 / 302	CFM Watts	1302 189	1310 252	1311 310	1309 355	1301 403
	350 CFM/ton	CFM Watts	1558 / 1688 290 / 354	1570 / 1613 367 / 389	1575 / 1535 439 / 415	1575 / 1455 505 / 434	1568 / 1373 563 / 444	CFM Watts	1557 290	1570 367	1575 439	1575 505	1569 563
	400 CFM/ton	CFM Watts	1790 / 1918 429 / 511	1800 / 1848 515 / 546	1801 / 1775 594 / 573	1793 / 1701 663 / 592	1698 / 1625 660 / 601	CFM Watts	1789 428	1799 515	1801 594	1794 663	1701 659
4.5 tons**	450 CFM/ton	CFM Watts	2018 / 2018 605 / 605	1973 / 1973 656 / 656	1857 / 1857 645 / 645	1749 / 1749 637 / 637	1651 / 1651 631 / 631	CFM Watts	2018 605	1975 656	1863 643	1757 634	1660 628
	† Factory Setting ** Not an actual OD size - Status LED will blink once per 100 CFM requested. In torque mode, actual airflow may be lower. - Torque mode will reduce airflow when static is above approximately 0.4" water column.												
	- If the air handler is applied in downflow or horizontal configurations, the airflow should not exceed 2000 CFM. Airflow above 2000 CFM could result in water blow-off. - All heating modes default to Constant CFM. - Cooling airflow values are with wet coil, no filter												

5TAMXD06AV41DA Minimum Heating Airflow Settings									
MODEL NO.	BAYEAAAC04BK1 BAYEAAAC04LG1 BAYEAAAC05BK1 BAYEAAAC05LG1	BAYEAAAC08BK1 BAYEAAAC08LG1	BAYEAAAC10BK1 BAYEAAAC10LG1	BAYEAAAC10LG3	BAYEABC15BK1	BAYEACB15LG3	BAYEABC20BK1	BAYEACC25BK1	
TAMXB0C48	1063 / 1188	1063 / 1500	1125 / 1500	1000 / 1188	1125 / 1563	1250 / 1625	1500 / 1750	1625 / 1813	
WITHOUT HEAT PUMP / WITH HP — SEE AIR HANDLER NAMEPLATE									

Features and Benefits

- Unique cabinet design
 - 2% or less air leakage
 - Precision applied — durable door seals
 - Specially designed air seal around refrigerant, condensate and conduit connections
 - Double wall foamed cabinet system
 - R-4.2 Insulating Value (Avg Insulating Value R-8.2)
 - No loose fiber design
 - Smooth cleanable interior design
 - Sweat eliminating design
 - Composite foamed cabinet doors
 - Water proof cabinet design
 - Integrated horizontal drain pans
 - Modular cabinet
- Multi-position up/down flow horizontal left/right
- Link™ Communicating or 24V Control
- Side return option (sold as accessory)
- Pre-marked Conduit Connection Locations
- Alert code notification
- Low voltage terminal connection point
- Phillips head door fasteners
- **Vortica®** blower with polarized plug connections and integrated slide deck for easy removal
- Aluminum coil with integrated slide deck for easy removal and polarized plug connections on coil EEV
- Patented enhanced coil fin
- Electronic Expansion Valve (EEV) with low ambient and low superheat compressor protection
- Slide in electric heaters with polarized plug connections (sold as accessory)
- Slide in hot water coils with polarized plug connections (sold as accessory)
- UVC light kit with safety switch and polarized plug connections (sold as accessory)
- Labeled panels and connections
- Molded in 1" standard filter rail
- Variable speed ECM motor
- Soft start fan motor operation
- **Comfort R™** mode
- Built in fan delay modes
- Maximum width of 23.5"
- Compact 20.8" depth with doors removed
- Fused 24V power
- **5 Year Warranty**
- **10 Year Warranty Registered**
- **Optional Extended Warranty Available**

About Trane and American Standard Heating and Air Conditioning

Trane and American Standard create comfortable, energy efficient indoor environments for residential applications. For more information, please visit www.trane.com or www.americanstandardair.com.



The manufacturer has a policy of continuous data improvement and it reserves the right to change design and specifications without notice. We are committed to using environmentally conscious print practices.