

Rigid Steel Three Piece Coupling

Industrial SPEC-grade

Size Range: 1/2" - 4"

Product Series: ER Threaded 3 Piece Couplings

Material: Solid Alloy Steel Construction


Made in the USA

AMFICO threaded three piece couplings join two lengths of threaded conduit when neither can be turned.

Twice the Strength and Durability with a Fraction of the Weight and Size of Malleable Iron

Features:

- Precision Machined Cut Threads Prevents Lazy or Cross Threading*
- AMFICO EZ **Torque** Flat Hex Surfaces
- Easily Torques Tight and Right
- Suitable for Raint Tight and Concrete Tight When Taped
- Zinc Plated with a Chromate Finish, Galvanized Option **

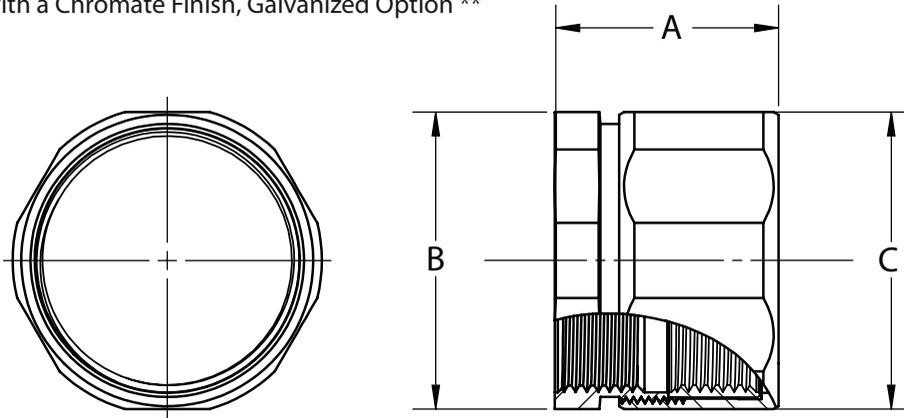

*** TRUE & TIGHT ALIGNMENT**

Brinell Hardness Two Times Die Cast or Malleable Products
 PREVENTS Soft Thread Causing Misaligned Pipe and
 PROVIDES Full Torque Value to Guarantee Tight and Right Connection

Cat #	TRADE SIZE	A LENGTH	B HEX	C HEX	Wt. Per/C
ER50	1/2"	1-1/16"	1-1/16"	1-1/8"	12
ER75	3/4"	1-1/16"	1-1/4"	1-3/8"	16
ER100	1"	1-3/8"	1-9/16"	1-5/8"	28
ER125	1-1/4"	1-11/16"	2"	2-1/16"	49
ER150	1-1/2"	1-3/4"	2-3/16"	2-5/16"	62
ER200	2"	1-7/8"	2-11/16"	2-13/16"	88
ER250	2-1/2"	2-7/16"	3-1/4"	3-1/4"	148
ER300	3"	2-7/16"	3-15/16"	3-15/16"	183
ER350	3-1/2"	2-11/16"	4-7/16"	4-7/16"	212
ER400	4"	2-11/16"	4-15/16"	4-15/16"	454

Compliances:

- Certified Made in the USA
- UL 514B, 467
- Rain Tight, Concrete Tight When Taped
- Suitable for Direct Burial
- NEMA Standard FB1
- Federal Standard A-A-50553
- Certified for MIL-STD 810 Sinusoidal Vibrations
- CSA Standard: C22.2 No. 18F
- RoHS Compliant
- REACH Compliant
- CA Prop 65 Compliant
- UNSPSC 39131707



Available OPTIONS:

- ** Galvanized Plating - Option
- For this Option, Add Suffix "G" to Above Cat Number

*** Guaranteed to be the BEST 3 Piece Steel Coupling Made**