




GE APPLIANCES
a Haier company

CustomerNet

GE Zoneline® Cooling and Electric Heat Fixed Speed Unit with Corrosion Protection 15,000 BTU, 230/208 Volt Model# AZES15DCXXA

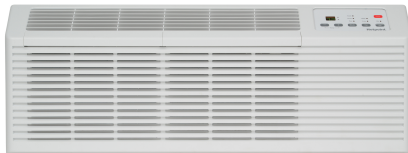

- R454B - Most environmentally friendly refrigerant on the market
- Heat pump down to 25°F
- Electronic touch controls with LED display
- Quiet Operation - backed on mastic sound barrier
- Corrosion protection package
- SMC basepan and bulkhead
- Electronic temperature limiting
- Fresh air vent

FEATURES

Zoneline Features	"Sleep" Mode "Smart Fan" Fan Cycle Control Auto Power Recovery Automatic Indoor Frost Control Central Desk Control Compatibility Freeze Sentinel Heat Sentinel (85F) Proportional - Integral ID Airflow Random Twist/Length Segment Tangential Blower Remote Thermostat Compatibility Universal Heaters Weather Protected Electrical Components
Louver Style	Reversible
Control Type	Tactile touch pad with LED Display
Discharge Grille	2-position
Fan Speed Selections	Hi/Low Cooling Hi/Low Fan Only Hi/Low Heating
Sensible Heat Ratio	63%
Power Factor	97
Product Type	Packaged Terminal Air Conditioners (PTAC)
Refrigerant Type	R454B
Filter Type	Rigid Frame Slide-Out
Manual Vent Control	Hidden
Chassis Type	Slide-In
Fan Motor	2
Temperature Limiting	Electronic 7-Step
Fan Speed Control	Yes
Temperature Range	60 - 85 F
Corrosion Treated	Yes
Heat - Cool	Yes
Electronic Micro Computer Control	Yes
Fan Cycle Switch	Yes
Central Desk Control Compatibility	Yes
Rotary Compressor	Yes
Vent Control	3-position
Venting Features	Concealed Manual Vent Control Outdoor Vent Control - 3 Positions Vent Air Filter
Heating System	Electric Resistance

Have more questions? Please contact 1-800-626-2000



GE APPLIANCES
a Haier company

CustomerNet

GE Zoneline® Cooling and Electric Heat Fixed Speed Unit with Corrosion Protection 15,000 BTU, 230/208 Volt Model# AZES15DCXXA

APPROXIMATE DIMENSIONS(HxDxW)

- 16 H x 42 W x 20 13/16 D

CAPACITY

- Cooling BTUH (MAX) - 14800.00Btu
- CFM Indoor Fan Low - 330
- CFM Indoor Fan High - 440
- Cooling EER (BTUH / Watt) - 10.5 / 10.6
- Dehumidification (pts./hr.) - 4.5 (High Speed)
- Vent CFM (high fan at zero ESP) - 33
- Cooling BTUH (MIN) - 14500Btu

APPEARANCE

- Color Appearance - Grey White

WEIGHTS & DIMENSIONS

- Overall Width (in) - 42in
- Approximate Shipping Weight (lb) - 117lb
- Overall Height (in) - 16in
- Overall Depth (in) - 20 13/16in
- Net Weight (lb) - 107lb

POWER / RATINGS

- Cooling - Amperes; L.R. - 31.5
- Cooling - Amperes; F.L. - Cooling - 6.3/6.7
- Cooling - Amperes - 6.3/6.7
- Cooling - Watts - 1390/1380
- Voltage (MIN) - 208V
- Heating BTUH - NA
- Voltage (MAX) - 230.000000V

ACCESSORIES

- Accessories Required for Installation - RAB42 - Wall Case

WARRANTY

- Warranty Notes - See written warranty for full details
- Labor Warranty - Limited 1-year entire appliance
Limited 5-year sealed refrigerating system
- Parts Warranty - Limited 1-year entire appliance
Limited 5-year sealed refrigerating system

CERTIFICATIONS

- Claims & Certifications - California Prop 65
UL
AHRI
CUL
NRCAN

