

PVC Coated Form Fittings - LB Form 8

Calbond offers the full line of Form 8 and Form 7 PVC coated conduit bodies. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.

Features:


- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are 1/2" to 4"
- Fittings are supplied with plastic encapsulated stainless steel screws
- Sealing sleeves extender 1 pipe diameter or 2 inches, whichever is greater, beyond all female openings

Standards:

- UL Listed Standard 514B
- CSA Standard: C22.2 No. 18

UL Listings and Compliances:

- Ferrous electrical conduit / File # DYIX.E226472
- Ferrous electrical conduit with PVC coating / File # DYJC.E226472

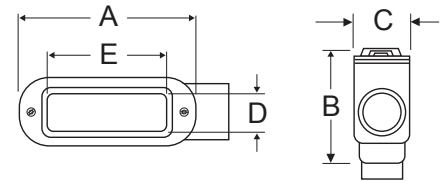

LB Form 8									
Item Number	Trade Size	Size Metric (mm)	A	B	C	D	E	Weight Per 100 (lbs)	Aluminum Item Number
PV0500LB18	1/2"	16	5.48	2.26	1.42	1.00	3.31	150	PA0500LB19
PV0700LB28	3/4"	21	6.35	2.48	1.60	1.19	3.94	200	PA0700LB29
PV1000LB38	1"	27	7.51	2.85	1.79	1.38	4.56	290	PA1000LB39
PV1200LB448	1-1/4"	35	8.82	3.38	2.23	1.75	5.31	410	PA1200LB49
PV1500LB58	1-1/2"	41	10.67	4.07	2.79	2.13	6.50	650	PA1500LB59
PV2000LB68	2"	53	13.04	4.85	3.79	3.00	8.56	820	PA2000LB69
PV2500LB78	2-1/2"	63	15.98	6.17	5.04	4.25	10.88	1820	PA2500LB789
PV3000LB888	3"	78	15.98	6.54	5.04	4.25	10.88	2120	PA3000LB889
PV3500LB98	3-1/2"	91	14.73	7.60	6.29	5.44	13.44	3120	PA3500LB989
PV4000LB108	4"	103	14.73	7.85	6.29	5.44	13.44	3200	PA4000LB1089

Calbond