

PVC Coated Form Fittings - T Form 8

Calbond offers the full line of Form 8 and Form 7 PVC coated conduit bodies. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.

Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are 1/2" to 4"
- Fittings are supplied with plastic encapsulated stainless steel screws




Standards:

- UL Listed Standard 514B
- CSA Standard: C22.2 No. 18

UL Listings and Compliances:

- Ferrous electrical conduit / File # DYIX.E226472
- Ferrous electrical conduit with PVC coating / File # DYJC.E226472

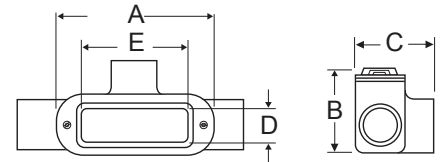

T Form 8									
Item Number	Trade Size	Size Metric (mm)	A	B	C	D	E	Weight Per 100 (lbs)	Aluminum Item Number
PV0500T18	1/2"	16	6.69	1.79	2.20	1.00	3.31	180	PA0500T19
PV0700T28	3/4"	21	2.50	2.04	2.35	1.19	3.94	250	PA0700T29
PV1000T38	1"	27	3.30	2.29	2.67	1.38	4.56	330	PA1000T39
PV1200T48	1-1/4"	35	1.90	2.67	3.20	1.75	5.31	490	PA1200T49
PV1500T58	1-1/2"	41	7.50	2.82	4.04	2.13	6.50	750	PA1500T59
PV2000T68	2"	53	11.70	3.60	5.04	3.00	8.56	1170	PA2000T69
PV2500T78	2-1/2"	63	19.80	4.48	6.73	4.25	10.88	1980	PA2500T789
PV3000T88	3"	78	23.10	4.85	6.73	4.25	10.88	2100	PA3000T889
PV3500T98	3-1/2"	91	21.00	5.73	8.17	5.44	13.44	2350	PA3500T989
PV4000T108	4"	103	24.00	5.98	8.17	5.44	13.44	2400	PA4000T1089

Calbond