



**MODELS 60<sup>®</sup>, 64<sup>®</sup> & 66<sup>™</sup>**

**UNDERGROUND WIRE CONNECTORS**

**FEATURES/BENEFITS:**



- PRE-FILLED TWIST-ON WIRE CONNECTORS PROVIDE ONE-STEP PROCESS
- SILICONE-BASED SEALANT PROTECTS AGAINST MOISTURE & CORROSION IN WET LOCATION APPLICATIONS
- LISTED TO UL 486G SEALED TWIST-ON WIRE CONNECTOR
- FOR USE IN DAMP/WET LOCATIONS OR DIRECT BURIAL/BELOW-GRADE APPLICATIONS

**ELECTRICAL:**

VOLTAGE: MODEL 60 <sup>®</sup>	600 V MAX*
MODEL 64 <sup>®</sup>	600 V MAX*
MODEL 66 <sup>®</sup>	600 V MAX*
	*SIGNS/FIXTURES 1000V

**PHYSICAL:**

HOUSING:	THERMOPLASTIC POLYESTER
INSERT:	STEEL
PLATING:	ZINC
TEMPERATURE:	105 C (221 F)
SEALANT	100% SILICONE

**STANDARDS & SPECIFICATIONS:**

UL 486C  
 UL 486G SEALED TWIST-ON WIRE CONNECTOR  
 UL 94V-2 FLAME RATING  
 CSA- C22.2 NO. 188  
 CSA- C22.2 NO. 198.2 FOR DIRECT BURIAL  
 RoHS COMPLIANT



**WIRE RANGE:** - Solid and/or stranded wire combinations unless stated otherwise  
 - Consult factory for numerous other combinations not listed

MODEL 60 <sup>®</sup>	MODEL 64 <sup>®</sup>	MODEL 66 <sup>™</sup>
STRIP LENGTH: 1/2" (12,7mm)	STRIP LENGTH: 5/8" (15,9mm)	STRIP LENGTH: 1" (25,4mm)
1 to 2 #10 1 to 3 #12 1 to 4 #14 2 #16 2 #18 1 #10 w/ 2 #12 1 #20 w/ 1 #18	1 to 3 #10 1 to 3 #12 2 to 5 #14 2 to 4 #16 2 to 4 #18 solid 3 or 4 #20 solid 3 or 4 #22 solid	1 to 2 #6 2 to 3 #8 2 to 5 #10 3 to 6 #12 1 #6 w/ 1 to 2 #8 2 #6 w/ 1 #10 or 1 #12 or 1 #14 2 #8 w/ 1 or 2 #10

**DIMENSIONS:**

Length = 1.68 in (42,7 mm)  
 Diameter = 0.65 in (16,5 mm)  
 Wingspan = 0.85 in (21,7 mm)

MODEL 60<sup>®</sup> IMAGE NOT AVAILABLE

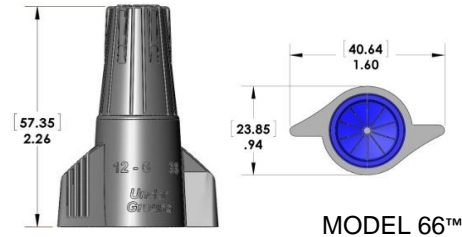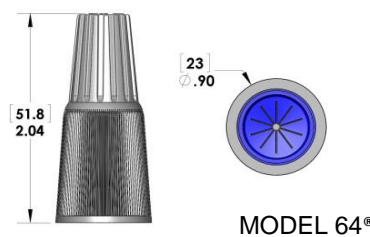

**ORDERING INFO:**

CATALOG #	MODEL	COLOR	PACKAGE TYPE:	WEIGHT LBS (KG):
30-1260	60 <sup>®</sup>	Gray/Gray	Box of 100	14.4 (6.5)
30-1264	64 <sup>®</sup>	Gray/Dk. Blue	Box of 50	34.1 (15.5)
30-1066	66 <sup>™</sup>	Gray/Dk. Blue	Box of 50	5.5 (2.5)

**FACTORY CONTACT:**

IDEAL INDUSTRIES, INC.  
 BECKER PLACE SYCAMORE IL  
 USA 60178  
 P: 1-800-435-0705  
 F: 1-888-222-6140  
 E: [contactus@idealindustries.com](mailto:contactus@idealindustries.com)

**SALES CONTACT:**