




Catalog Number: MK0402L1400RLM

Features and Ratings

- Outdoor Enclosure (Type 3R)
- Ringless Type Meter Cover
- Device Rating: 400A Max
- 120/240V~ 1 Phase, 3 Wire
- 120/208V~ 1 Phase, 3 Wire w/5th Jaw Installed
- Meter Socket Rating: 320A Continuous (400A Max.)
- 4 Jaw, Lever Operated Bypass with Jaw Tension Release
- Provisions for Field Installable Breakers
- Overhead or Underground Service Entrance
- (2) Service Disconnects in Separate Compartments
- 7/8" and 7/16" Barrel Lock Provisions
- Surface Mounting
- Uses HD Type Hubs

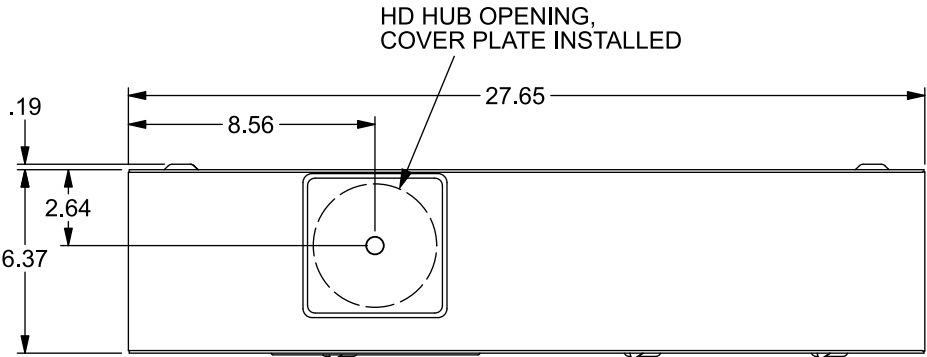

View Shown Without Compartment Covers

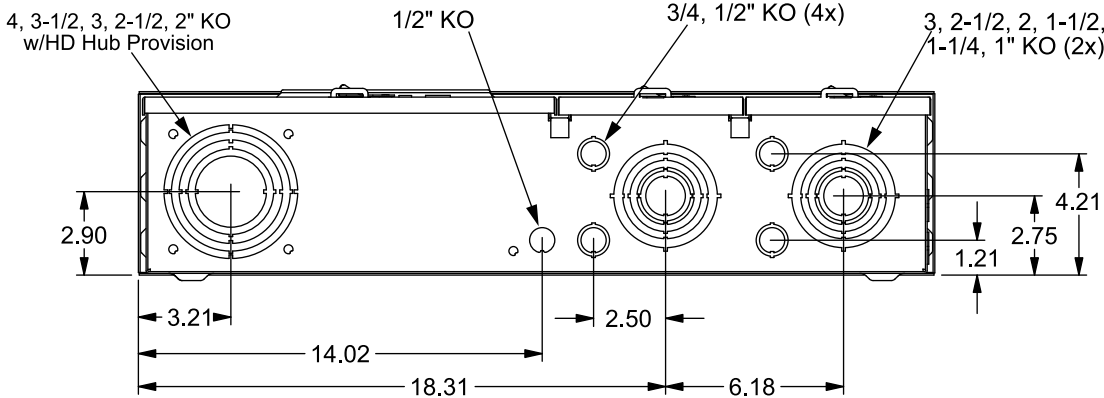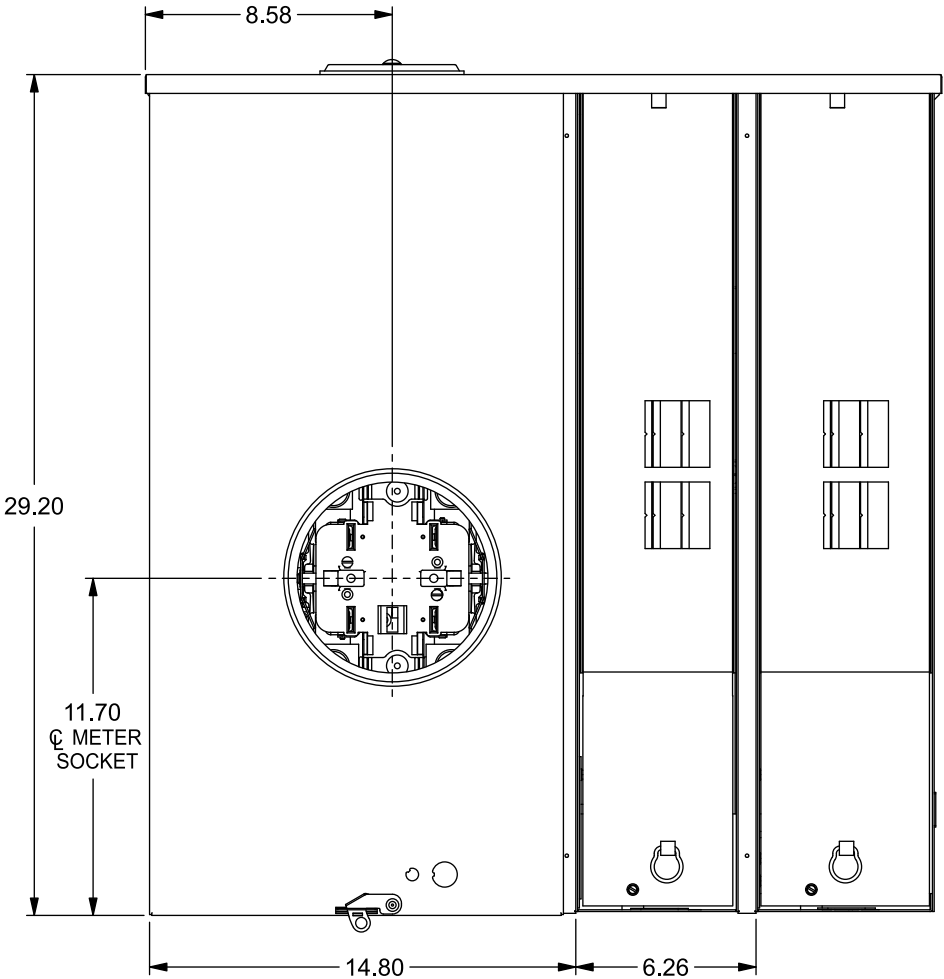

Accessories


FILLER PLATE..... ECQF3
5TH JAW SHIELD H35815-2
QP LINE TERM. BARRIER. . ECLTB7
NEUTRAL LUG KIT ECLK3N

ORDER HUBS FROM "HD" SERIES
COVERPLATE..... EC56933S
3" HUB EC56856
3 1/2" HUB EC56857
4" HUB EC56858




HARDWARE TIGHTENING TORQUES:
3/8" NUTS 250-300 LB.-IN.

Terminals and Schematic

TERMINAL RANGES		TORQUE
kcmil OR AWG; CU/AL		LB.-IN.
☐ (1) 600kcmil-#4 OR		500
(2) 250kcmil-1/0		500
☐ Alt. Lugs H56732-2		275
(2) 350kcmil - #4		
☐ (1) 2/0-#12		50
☐ (1) 300kcmil - #4 (ECLK3N)		250
☐ (1) 300kcmil - #4		250
☐ (1) #2 - 14		50

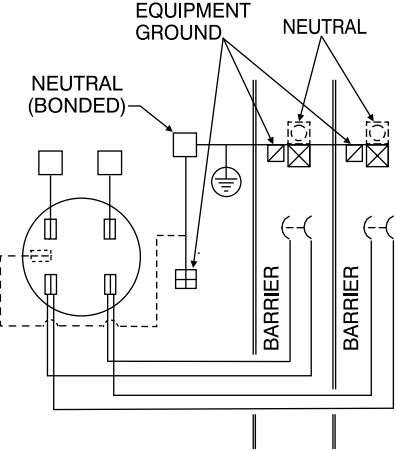

View Shown Without Covers, Deadfronts

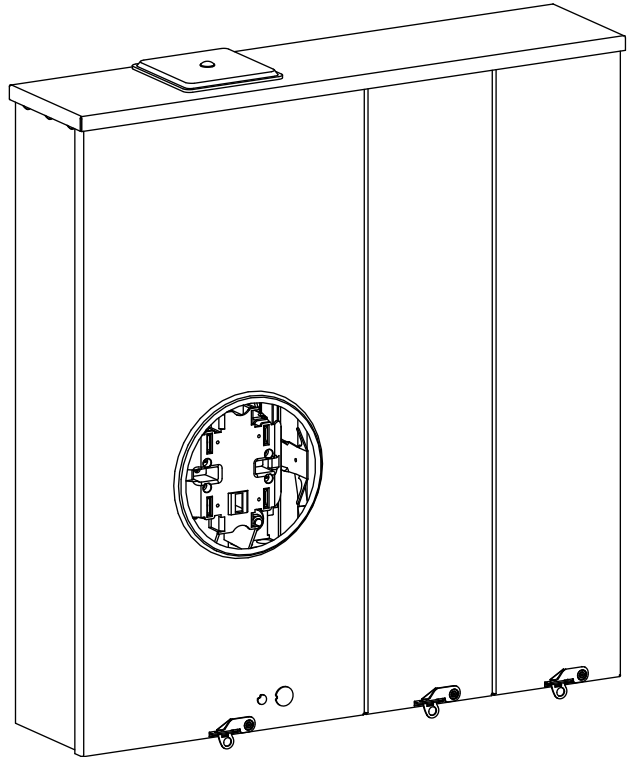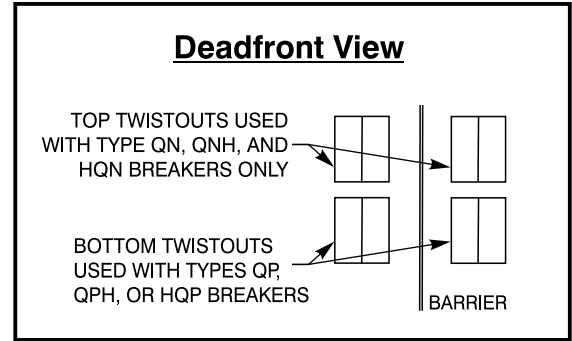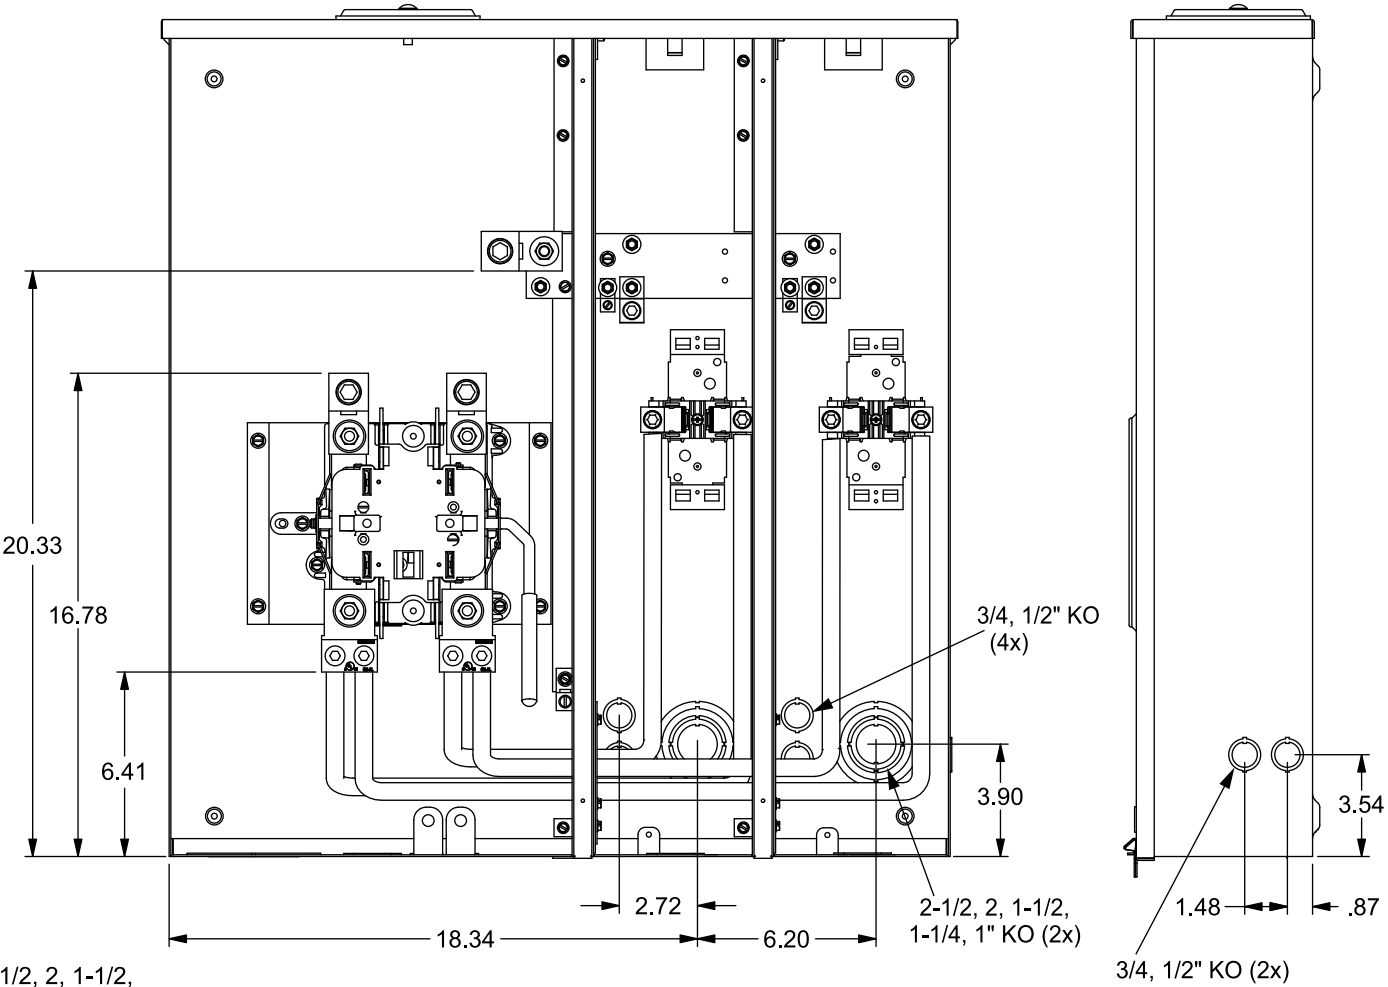

© 2021 Copyright Siemens Industry, Inc.

SIEMENS
Siemens Industry, Inc.

Outdoor Meter Main

Description:
400A, 1ph, Ringless, OH/UG, Lever Bypass

KAM 4/7/21 DO NOT SCALE DRAWING Dwg. No. **MK0402L1400RLM**