


Premium Grade Duct Tape

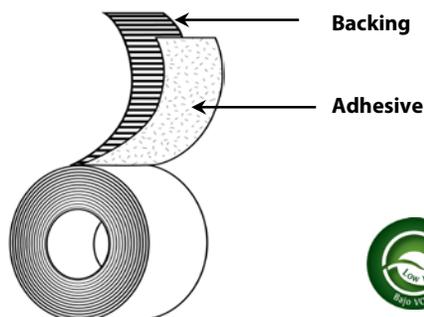

Backing: PE Coated Cloth

Adhesive: Rubber

Liner: N/A

Colors: Silver, Black

Specifications: Tested in accordance with UL 723

Standard Sizes: 48mm x 55m, 72mm x 55m

Applications

- Hanging and seaming poly sheeting
- Sealing and closure tape for poly bags
- Water-resistant packaging and seals
- General purpose packaging and repair
- Temporary holding and bundling
- Mediablast protection

Features

- PE-Coated Cloth Backing
- Natural Rubber Based Adhesive
- Low VOC Content

Benefits

- Good balance of tensile strength and tearability
- Conformable and moisture resistant
- Aggressive high adhesion
- Superior vertical hold
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	12.0 mils	0.305 mm	ASTM D-1000
Adhesion to Steel	90 oz/in	9.85 N/cm	PSTC-101
Adhesion to Backing	53 oz/in	5.80 N/cm	PSTC-101
Tensile Strength	27 lb/in	47.28 N/cm	ASTM D-1000
Elongation	24%		ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	
VOC Content	<1 g/L		

Recommended Storage Conditions: 32-90 °F at 50% RH ± 2%

Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.