

Premium Electrical Products & Accessories





At **Voltec Power & Lighting**, we know and understand that growth is directly related to new products. We strive to provide new and innovative products that positively impacts your ability to expand your market share and enhance your margins.

As we continue to provide knowledgeable, prompt, efficient and friendly customer service, our goal is to surpass your expectations. Voltec Power & Lighting is where quality and value come together!

Innovative Products

Industry Leader in Custom Products



Breadth of Line



Compare the Quality













Table of Contents

E-ZEELOCK® Locking Connector 4-0
Outdoor 300V Extension Cords
Kwik Kustom Extension Cords
EXTREME Extension Cords
Outdoor 600V Extension Cords
Kustom Kords Extension Cords/Quote Form
Adapters
Portable GFCIs
Adapters - Quad Box
Temporary Power
Temporary Lighting
Wiring Devices
Surge/Power Strips
Household/Workbench Cords
Replacement Cords for Power Tools
Range & Dryer Cords
Garbage Disposal & AC Power Supply Cords
Cord Reels
LED Lighting
Incandescent Worklights
Incandescent Trouble Lights with Retractable Reels
Fluorescent Worklights
Halogen Worklights
Heavy Duty Halogen Worklights
Dusk to Dawn Security Lighting35-36
Booster Cables
RV Adapters/Extenstion Cords with E-ZEEGRIP™38-39
RV Planograms
RV Adapters4
RV Adapters, Extension Cords and Power Supply Cords
Flexon Water Hoses
Product Replacement Parts
NEMA Chart
Glossary
Wiring Device Cross Reference 52
Regional Warehouse Contact Information
Warranty, Return of Goods, & Shipping Policies
Index of Parts

Voltec Power & Lighting Regional Distribution Warehouses Chino, California Orlando, Florida Chicago, Illinois Newark, New Jersey Houston, Texas Seattle, Washington See Page 53 for Contact Information





The information contained in this catalog is presented solely as a guide to product selection and is reliable to the best of our knowledge. Any printing errors are subject to correction in future releases or reprints of this catalog. Voltec Power & Lighting has taken precautions at the time of publication, to ensure the accuracy of the data and specifications presented herein, but reserves the right to modify, append or change the specifications of any and all products contained within this catalog at any time and without prior notice.









Exclusively from Voltec Power & Lighting





Locking Your Cord is E-ZEE as 1 • 2 • 3



Plug E-ZEE LOCK® Connector into male plug



2



Close E-ZEE LOCK® latching mechanism onto the cable of the male plug. (Must attach to the cable, not the male plug)

7



Twist E-ZEE LOCK® to a Locking Fit

- cULus Listed
- Securely connects power cords to stop annoying, unwanted disconnects
- Adds additional locking strength with a nylon arm, which is virtually unbreakable
- Extension cords are available with power indicator light
- Adapters are available with E-ZEELOCK®












Outdoor 300V SJTW Extension Cords -40°F to 140°F







- ✓ Durable Nylon Locking Arm





Prevents Unwanted Disconnects











Adapters





E-2451	LOC		0 Amp (vith Lig							Us Intertek		
ITEM PN# CORD WIRE WIRE WIRE OUTLETS PLUG RECEPTACLE POWER RATING COLOR TYPE COLOR TYPE TYPE AMPS WATTS												
04-00214	2ft	10/4-10/3	STW	Yellow	3	L14-30P	5-20R	20	2500	4		
04-00215	2ft	10/3	STW	Yellow	3	TT30P	5-20R	20	2500	4		
04-00216	2ft	10/3	STW	Yellow	3	L5-30P	5-20R	20	2500	4		
04-00217 2ft 10/3 STW Yellow 3 L5-20P 5-20R 20 2500 4												
See page 14	for detail	images.										





I	E-Z-2	ZLOC	 ∦-		ng Plug to ound Plug						(II)
	ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY
	04-00092	1ft	12/3	STW	Yellow	1	L5-20P	5-15R	15	1875	10
	04-00093	1ft	12/3	STW	Yellow	1	5-15P	L5-20R	15	1875	10





TOCKHOLOGOWICH	ELOC	<i>X</i> -		Multi-Purpose Cord Lock Adapter Clip Strip							
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	POWER RATING AMPS WATTS	PACK QTY		
04-00491	1ft	12/3	STW	Yellow	1	5-15P	5-15R	15 1875	6		













Outdoor 300V SJTW Extension Cords -40°F to 140°F

3-Conductor 300V SJTW Extension Cords PLUG POWER RATING PACK CORD WIRE WIRE RECEPTACLE ITEM PN# **OUTLETS** COLOR LENGTH TYPE WATTS QTY Yellow 05-00108 25ft 16/3 **SJTW** 5-15P 5-15R 13 1625 12 1 05-00109 50ft 16/3 **SJTW** Yellow 1 5-15P 5-15R 13 1625 12 05-00110 100ft 16/3 **SJTW** Yellow 1 5-15P 5-15R 10 1250 6



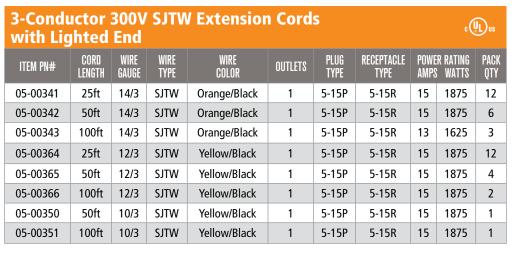





S-Z-Z-Z-Z-Z-Z-Z-Z-Z-Z-Z-Z-Z-Z-Z-Z-Z-Z-Z	2 2 1 h	OCK	3-C wit	onductor 300 h E-ZEELOCK)V SJT ™ an	W Ext	tension Ited End	Cords d
	CORD	MADE	WIDE	WEDE		BLUG	DECERTACIE	DOWED DATING





ը (<mark>Մ</mark>L) ու

(UL)



3-Conductor 300V SJTW Extension Cord with Lighted Power Block

ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	POWE AMPS	R RATING Watts	PACK QTY
05-00120	25ft	14/3	SJTW	Orange/Black	3	5-15P	5-15R	15	1875	12
05-00121	50ft	14/3	SJTW	Orange/Black	3	5-15P	5-15R	15	1875	6
05-00122	100ft	14/3	SJTW	Orange/Black	3	5-15P	5-15R	13	1625	3
05-00123	25ft	12/3	SJTW	Yellow/Black	3	5-15P	5-15R	15	1875	8
05-00124	50ft	12/3	SJTW	Yellow/Black	3	5-15P	5-15R	15	1875	4
05-00125	100ft	12/3	SJTW	Yellow/Black	3	5-15P	5-15R	15	1875	2














Outdoor 300V SJTW Locking Extension Cords-40°F to 140°F



3-Condu				/ Extension	n Corc	ı			c(UL us	
ITEM PN#	THE COLOR STATES TYPE AMPS WA										
05-00128	50ft	12/3	SJTW	Yellow/Blue	1	L5-20P	L5-20R	20	2500	4	
05-00130	100ft	12/3	SJTW	Red/Black	1	L5-20P	L5-20R	15	1875	2	
05-00131	100ft	12/3	SJTW	Yellow/Blue	1	L5-20P	L5-20R	15	1875	2	
05-00333	100ft	10/3	SJTW	Yellow/Black	1	L5-20P	L5-20R	20	2500	1	

Kwik Kustom 300V SJTW Extension Cords -40°F to 140°F













Stand Out From The Crowd. Available in stock.















All-Weather Cord - 300V

100% TRUE TPE CONSTRUCTION


The EXTREME All-Weather Extension Cord is constructed of 100%

TPE (thermo-plastic elastometer) compound which allows the cord to stay flexible in the most extreme climates without affecting the cord's performance.

The TPE compound provides a lightweight, tangle-free construction to the EXTREME cord, not commonly found on most standard PVC cords. Tested in some of the harshest weather conditions in Alaska, the EXTREME All-Weather Extension Cord is designed for durability to last a lifetime!



EXTREME All-Weather Cord 300V SJEOW Extension Cords -94°F to 221°F

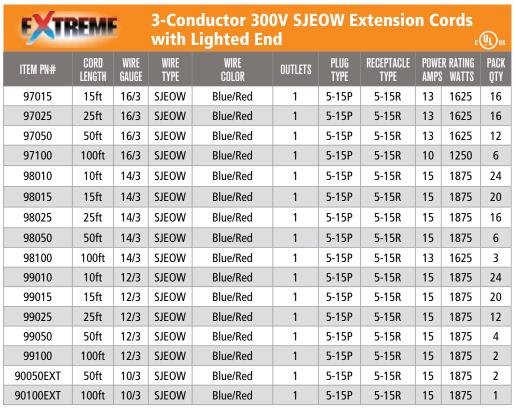



TPE-Rubber (SJEOW) which provides maximum flexibility year-round. Includes power indicator light to show when power is on.

EXT	REM	Ε		nductor 30 Triple Out	on Cords					
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	POWE AMPS	R RATING Watts	PACK QTY
98025PB	25ft	14/3	SJEOW	Blue/Red	3	5-15P	5-15R	15	1875	6
98050PB	50ft	14/3	SJEOW	Blue/Red	3	5-15P	5-15R	15	1875	4
98100PB	100ft	14/3	SJEOW	Blue/Red	3	5-15P	5-15R	13	1625	2
99002PB	2ft	12/3	SJEOW	Blue/Red	3	5-15P	5-15R	15	1875	12
99025PB	25ft	12/3	SJEOW	Blue/Red	3	5-15P	5-15R	15	1875	12
99050PB	50ft	12/3	SJEOW	Blue/Red	3	5-15P	5-15R	15	1875	4
99100PB	100ft	12/3	SJEOW	Blue/Red	3	5-15P	5-15R	15	1875	2













All Weather Outdoor 300V SEOW Locking Extension Cords -58°F to 228°



<u>A</u>	-71	1	3-Co Lock	nductor 30 ing Extensi	OW rds	c UL us					
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY	
05-00231	100ft	12/3	SJEOW	Black	1	L5-20P	L5-20R	15	1875	2	

All Weather Outdoor 600V SEOW Locking Extension Cords -58°F to 228°



ALL	-171	The state of the s		nductor 600 ng Extensi					e l	(UL) us
ITEM PN#	ITEM PN# CORD WIRE WIRE WIRE OUT- PLUG RECEPTACLE TYPE COLOR LETS TYPE TYPE									PACK QTY
06-00180	50ft	10/3	SEOW	Black	1	L6-30P	L6-30R	30	7500	1
06-00181	100ft	10/3	SEOW	Black	1	L6-30P	L6-30R	25	6250	1

Outdoor 600V STW Extension Cords -40°F to 140°



3-Condu	ıctor	600V	STW	Extension	Cords				c (U	Dus
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	II CIIII	R RATING Watts	PACK QTY
06-00162	50ft	12/3	STW	Yellow	1	5-15P	5-15R	15	1875	2
06-00163	100ft	12/3	STW	Yellow	1	5-15P	5-15R	15	1875	2



3-Condu	ıctor	600V	STW	Locking Ex	ctensic	on Cor	ds		ال	Dus
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING WATTS	PACK QTY
06-00167	50ft	12/3	STW	Yellow	1	L5-20P	L5-20R	20	2500	2
06-00168	100ft	12/3	STW	Yellow	1	L5-20P	L5-20R	15	1875	2











Customized Cords

CORD IDENTITY PREVENTS CORD LOSS

Customize and Tailor Fit Your Extension Cord to Benefit Your Need.

- Advertise your Company Name.
- Prevent Loss of cords from jobsite.
- Identify a color or stripe to a specific length and gauge.
- Provide a safe work area with high visibility colors.

Choose from many Custom Colors

- Customize a color to meet your preference.
- Company Colors
- Personal Choice

Choose from Single or Double Striping

- Clearly add identification to cords with striping.
- The color and stripe combinations are endless.
- Single stripe
- **DOUBLE** stripe

Choose to Personalize and Advertise with Custom Identification

- Keep cords on the jobsite. Choose from a standard indent wheel or ink printed.
- Company Name & Phone No.
- "Property of ABC"

Choose Custom Logo Cords

- Add your company logo or pattern*
- * Call for additional information.

Choose Plug and Receptacle Ends

- Choose any of our standard plugs and receptacles to fit your exact need.
- Molded ends come in a variety of custom colors.


Choose Unique Features

- E-ZEELOCK[™] Locking Connector prevents annoying disconnects
- Illuminated Ends timesaver, quickly shows you've got power.



Call Us at 1-866-4-VOLTEC or go to: www.voltec-industries.com Custom Quote Forms available online.























Kustom Quote Form

Distributor: Customer:		Pre _l Dat	oared By: e:	
Quantity: of 25ftof 50ftof 100ftof feet	Gauge:16/314/312/310/36/3, 8/1	Cord Type:SJTW 300VSJEOW 300VSTW 600VSEOW 600V	OPTIONS: E-ZEELOCK GFCI: <u>Yes/N</u>	
Choose Plug:				Choose Receptacle:
NEMA 5-15P	S-1SP	+	5-15R	NEMA 5-15R
NEMA L5-20P	L5-20P	+	GO ON LS-20R	NEMA L5-20R
NEMA 5-15P	S-15P	+	5-15R 5-15R	NEMA 5-15R(3)
50A Plug		•	5-138	50A Receptacle
Custom Imprin	ting: (Circle Ye	es or No)		
Standard Indent Custom ink prin		-	orint: <u>Yes/No</u>	
Custom Text: (m 1 line:	naximum charact	ers 125)		
Cord Color:	Single Stripe:	Double Strip Yes/No or Color:	·	olor:
DARK RED	TEAL	GREY	PURPLE	Neon/Fluorescent Colors
RED	DARK BROWN	LIGHT GREY	MAUVE	IEON YELLOW NEON PINK
NAVY BLUE	BROWN		_	NEON GREEN NEON ORANGE
LIGHT BLUE	TAN	OLIVE GREEN	PINK	
BRIGHT BLUE BABY BLUE	CREAM DARK GREY	DARK GREEN PLUM	Co	OTE: Color charts are for reference only. lors may not be exact match to cord lor.






Adapters













U-Grour	nd "Y'	" Ada	pter	with Light	ed End	ds			Œ)		
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		POWER RATING AMPS WATTS			
04-00094	2ft	12/3	STW	Yellow	2	5-15P	5-15R	15	1875	12		



"Y" Adapter with Locking Plug with Lighted Ends												
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY		
04-00095	2ft	12/3	STW	Yellow	2	L5-20P	L5-20R	20	2500	12		



U-Grou r	U-Ground "W" Adapter with Lighted Ends											
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		POWER RATING AMPS WATTS			
04-00096	2ft	12/3	STW	Yellow	3	5-15P	5-15R	15	1875	12		



"W" Ad	"W" Adapter with Locking Plug and Lighted Ends											
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY		
04-00097	2ft	12/3	STW	Yellow	3	L5-20P	L5-20R	20	2500	12		















Adapters



							P	RO:	SERIES pr	oduct			
6-2464 ***********************************	With Lighted Linds and Clear Flug												
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		ER RATING S watts	PACK QTY			
04-00214	2ft	10/4-10/3	STW	Yellow	3	L14-30P	5-20R	20	2500	4			
04-00215	2ft	10/3	STW	Yellow	3	TT30P	5-20R	20	2500	4			
04-00216	2ft	10/3	STW	Yellow	3	L5-30P	5-20R	20	2500	4			
04-00217	2ft	10/3	STW	Yellow	3	L5-20P	5-20R	20	2500	4			









Locking Plug to U-Ground Connector												
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	POWER RATING AMPS WATTS		PACK QTY		
04-0092N	1ft	12/3	STW	Yellow	1	L5-20P	5-15R	15	1875	10		
U-Groun	d Plu	g to	Locki	ng Connec	ctor					(JI)		
04-0093N	1ft	12/3	STW	Yellow	1	5-15P	L5-20R	15	1875	10		



								nU	SEKIES D	roduct			
E-ZEELOGK Locking Plug to U-Ground Connector													
A COUNTY OF THE PARTY OF THE PA			LOCKI	ng Piug t	o u-G	rouna	Conne	ctor					
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY			
04-00092	1ft	12/3	STW	Yellow	1	L5-20P	5-15R	15	1875	10			
U-Ground Plug to Locking Connector													
04-00093	1ft	12/3	STW	Yellow	1	5-15P	L5-20R	15	1875	10			



3-Outlet	3-Outlet Wall Tap Adapters												
ITEM PN#	COLOR	COLOR OUTLETS PLUG RECEPTACLE POWER RATING TYPE TYPE AMPS WATTS											
04-00085	Clear with Light	3	5-15P	5-15R	15	1875	25						
04-00087	Yellow	3	5-15P	5-15R	15	1875	25						





PORTABLE GFCI

Ground Fault Circuit Interrupters

Voltec has a full line of portable GFCI adapters, including right angle and in-line configurations, to fit every application. Choose from both 15 Amp u-ground and 20 Amp locking configurations. GFCI's protect the user from an electrical shock resulting from an unequal flow of electricity caused by current leakage. The Occupational Safety and Health Administration (OSHA) regulations state "it is the employer's responsibility to provide GFCI's on all 120 volt, single phase, 15 and 20 Amp receptacles on job sites that are not part of the permanent wiring of the structure." All of Voltec's GFCI's meet or exceed all UL, cUL and OSHA requirements.

15AMP Right Angle GFCI with Lighted Power Block c (UL) us WIRE Color RECEPTACLE POWER RATING PACK CORD WIRE ITEM PN# **OUTLETS** LENGTH TYPE TYPE AMPS WATTS TYPE QTY 04-00101 2ft 12/3 **SJTW** Yellow/Blue 3 5-15P 5-15R 15 1875 6



15AMP	15AMP In-Line GFCI with Power Block													
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	POWE AMPS	PACK QTY					
04-00105	2ft	12/3	SJTW	Yellow/Black	3	5-15P	5-15R	15	1875	6				



20AMP		C	(UL) US							
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY
04-00102	3ft	12/3	STW	Yellow/Blue	3	5-15P	5-15R	15	1875	6



20AMP	20AMP In-Line GFCI with Lighted Ends													
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		POWER RATING AMPS WATTS					
04-00103	3ft	12/3	STW	Yellow/Blue	1	5-15P	5-15R	15	1875	6				



20AMP	In-Lin	e GF	CI wi	th Lighted	Locki	ng En	ds			(UL) us
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		POWER RATING AMPS WATTS	
04-00104	3ft	12/3	STW	Yellow/Blue	1	L5-20P	L5-20R	20	2500	6



CORD WIRE LENGTH GAUGE TYPE COLOR UTLETS PLUG TYPE POWER RATING PACK TYPE COLOR TYPE COLOR COL											
ITEM PN# LENGTH GAUGE TYPE COLOR UUTLETS TYPE TYPE AMPS WATTS QTY 04-0092G 3ft 12/3 STW Yellow/Blue 1 L5-20P 5-15R 15 1875 6	S- 43	7100	<i>X</i> -							C	(UL) us
	ITEM PN#	-				OUTLETS					
04-0093G 3ft 12/3 STW Yellow/Blue 1 5-15P L5-20R 15 1875 6	04-0092G	3ft	12/3	STW	Yellow/Blue	1	L5-20P	5-15R	15	1875	6
	04-0093G	3ft	12/3	STW	Yellow/Blue	1	5-15P	L5-20R	15	1875	6





15 AMP	Grou	nded	GFCI	Outlet Ad	apter					
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	COLOR OUTLETS PLUG RECEPTACLE POWER RATING TYPE TYPE AMPS WATTS						
04-00106				Black	1	5-15P	5-15R	15	1875	6



PRO SERIES product









PRO SERIES product

Adapters - Quad Box



		710	JUNIES P	Toduct						
Quad Bo	ox wit	h In-L	ine G	FCI						
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	POWE Amps	R RATING Watts	PACK QTY
04-00107	3ft	12/3	STW	Yellow	4	5-15P	4 x 5-20R	15	1875	4
04-00108	3ft	12/3	STW	Yellow	4	5-15P	2ea 5-20R 2 ea L5-20R	15	1875	4
GFCI Protect	cted				• We	ather Proo	f Receptacle Co	vers		
• NEMA 3R F	Rated				• 20	AMP Rate	d GFCI Protection	n		

Temporary Power

The **Voltec T-BOX™** is made with the highest quality components to withstand rugged environments and exposure. They are cETLus listed as a Temporary Portable Power Distribution Center rated NEMA 3R for use in wet and damp locations, meeting all new GFCI standards.

Voltec offers a variety of items for your temporary power needs. Applications include construction sites, entertainment industry, fairs, carnivals, party rental, and convention centers. We offer heavy-duty power cords featuring 50 Amp plugs and connectors.





NEMA 3R Rated For Outdoor Use • Wet and Damp Locations CETLUS Intertek Listed 5000285 Conforms to UL STD. 508 CERTIFIED to CSA STD, C22.2 NO. 14

Commercial Power Distribution Center

Tempor	ary Pow	er Box							
ITEM PN#	DESCRIPTION	POWER INLET	POWER OUTLET	GFCI	NO. GFCI	RECE QTY	PTACLES Type	CIRCUIT BREAKER Protected	PACK QTY
09-00375	Locking	50AMP 125/250V	50AMP 125/250V	Yes No	3	6 1	L5-20R L6-30R	Yes Yes	1
09-0T376	U-Ground	50AMP 125/250V	50AMP 125/250V	Yes No	3	6 1	5-20R L6-30R	Yes Yes	1 1
09-00675	Locking	50AMP 125/250V	50AMP 125/250V	Yes No	6	6 1	L5-20R L6-30R	Yes Yes	1
09-0T676	U-Ground	50AMP 125/250V	50AMP 125/250V	Yes No	6	6 1	5-20R L6-30R	Yes Yes	1 1



For Outdoor Use, Wet and Damp Locations

- Six(6) 20 Amp Outlets Circuit Breaker protected
- 30 Amp 250V Receptacle Circuit Breaker
- 50 Amp Inlet and Outlet Recessed for Safety
- Circuit breaker Protection for ALL outlets
- Weatherproof covers on all outlets, inlets and circuit breaker panel



Repair parts & service available in Chino, California



Six (6) Auto Reset GFCI Modules Six (6) Circuit Breaker Protection

Six (6) 20 Amp Receptacles











Temporary Power

Vinyl Te	Vinyl Temporary Power Cords -40° to 140°F													
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	POWE Amps	R RATING Watts	PACK QTY				
09-00214	50ft	6/3-8/1	STOW	Black	1	50AMP	50AMP	50	12500	1				
09-00215	100ft	6/3-8/1	STOW	Black	1	50AMP	50AMP	40	10000	1				



		T	empor	ary Po	wer C	ords -!	58° to 2	28°F		
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	POW Amps	ER RATING Watts	PACK QTY
09-00431	50ft	6/3-8/1	SEOW	Black	1	50AMP	50AMP	50	12500	1
09-00432	100ft	6/3-8/1	SEOW	Black	1	50AMP	50AMP	40	10000	1



Vinyl Te	mpor	ary "Y	" Ada	pter -40°	to 14	0°F				
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	POWE Amps	R RATING Watts	PACK QTY
09-00435	2ft	6/3-8/1	STOW	Black	2	50AMP	50AMP	50	12500	1



Emerge	ncy R	espons	se ST\	N Cord -4	l0° to	140°F				
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	POWE Amps	R RATING Watts	PACK QTY
09-00437	10ft	6/3-8/1	STW	Black	1	14-50P	50AMP	50	12500	2



							PKU!	SERIES pr	oduct
400W N	letal I	Halid	e - Ten	nporary	Area Lig	ht - Pulse	Star	t (s UL us
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	BULB Base	INPUT Voltage	BULB Rating	PLUG Type	PACK QTY
08-00400	3ft	18/3	SJTW	Black	A39	120/208V 240/277V	400	5-15P	1



							PhO:	SEKIES DI	oduct
75W LEI	Tem	pora	ry Are	a Work I	Light				c UL us
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	BULB Type	INPUT Voltage	LUMEN	PLUG Type	PACK QTY
08-00403	3ft	18/3	SJTW	Black	COB	120/277V	9,100	5-15P	1



							PRO	SERIES pr	oduct
100W LI	D Ter	npor	ary Ar	ea Work	Light				c (UL) us
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	BULB Type	INPUT Voltage	LUMEN	PLUG Type	PACK QTY
08-00404	10ft	18/3	SJTW	Black	SMD	100/277V AC 50-60Hz	12,000	5-15P	1









Temporary Lighting

Light Strings - Voltec's wide variety of light strings are the perfect solution to your temporary lighting needs at locations such as construction sites, parking lots, marinas and tree lots. Light strings are available in 50 or 100 ft lengths and are made with heavy-duty molded 150 watt sockets, which are spaced every ten feet. All of our light strings have pre-assembled plastic or metal cages which saves you time, as well as the cost of installation.



LED Ligh	t Stri	ng w	ith P	lastic	Cag	e	P	RO SERIES	produ	ct [L)us
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	BULB Watts	OUTLETS	PLUG Type	RECEPTACLE Type	TOTAL Lumen	KELVIN Rating	PACK QTY
08-01187LED	50ft	14/3	SJTW	Yellow	10	5	5-15P	5-15R	4250	6500	1
08-01188LED	100ft	14/3	SJTW	Yellow	10	10	5-15P	5-15R	8500	6500	1
Bulbs Include	• 8!	50 Lume	n per Bul	b	Limited Wa	rranty					



	U-Ground Light Strings with Plastic Cage											Us Us
	ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	BULB Watts	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY
ſ	08-00187	50ft	14/2	SJTW	Yellow	150	5	1-15P	N/A	15	1875	1
	08-00188	100ft	14/2	SJTW	Yellow	150	10	1-15P	N/A	13	1625	1
	08-01187	50ft	14/3	SJTW	Yellow	150	5	5-15P	5-15R	15	1875	1
	08-01188	100ft	14/3	SJTW	Yellow	150	10	5-15P	5-15R	13	1625	1
	08-00189	50ft	12/3	SJTW	Yellow	150	5	5-15P	5-15R	15	1875	1
	08-00190	100ft	12/3	SJTW	Yellow	150	10	5-15P	5-15R	15	1875	1
•	08-00193	50ft	12/3	STW	Yellow	150	5	5-15P	5-15R	15	1875	1
	08-00194	100ft	12/3	STW	Yellow	150	10	5-15P	5-15R	15	1875	1





Locking Light Strings with Plastic Cage											
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	BULB Watts	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY
08-00191	50ft	12/3	SJTW	Yellow	150	5	L5-20P	L5-20R	20	2500	1
08-00192	100ft	12/3	SJTW	Yellow	150	10	L5-20P	L5-20R	15	1875	1



ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	BULB Watts	OUTLETS	PLUG Type	RECEPTACLE Type	1 01112	R RATING Watts
08-00197	50ft	12/3	SJTW	Yellow	150	5	5-15P	5-15R	15	1875
08-00198	100ft	12/3	SJTW	Yellow	150	10	5-15P	5-15R	15	1875
08-00199	50ft	12/3	STW	Yellow	150	5	5-15P	5-15R	15	1875

Yellow

PRO SERIES product

08-00200

100ft

12/3

	-	-
 	- 	
		99

Locking Light Strings with Metal Cage								O SERIES p	roduct 6	UL) us
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	BULB Watts	OUTLETS	PLUG Type	RECEPTACLE Type	POWER RATING AMPS WATTS	PACK QTY
08-00202	100ft	12/3	STW	Yellow	150	10	L5-20P	L5-20R	20 2500	1

150

10

5-15P





Light St	Light String Replacement Cages								
ITEM PN#	DESCRIPTION	PACK QTY							
08-00203	Plastic Cage for Light String	20							
08-00204	Metal Cage for Light String	20							

U-Ground Light Strings with Metal Cage

STW

08-00025 10 WATT LED Replacement Bulb Parts & Bulbs available. See page 45.

5-15R



QTY

1

1

1

1875









12-00226YL

Wiring Devices

C (JT) ns **Thermal Plastic Housing** PACK PLUG/RECEPTACLE PLUG/RECEPTACLE ITEM PN# TYPE MATERIAL QTY 12-00244 5-15P 10 Plug Nylon 12-00245 Receptacle 5-15R Nylon 10

(2)

12-00225YL

We carry Bryant, Marinco and Leviton product. For manufacturer's cross reference, see page 52.





Nylon I	Male Plu	ugs		ال	Jus
ITEM PN#	PLUG	POWER Rating Amps	MATERIAL	NEMA	PACK QTY
12-00223	1-15P	15	Nylon	1-15P	10
12-00225	5-15P	15	Nylon	5-15P	10
12-00227	5-20P	20	Nylon	5-20P	10
12-00229	L5-20P	20	Nylon	L5-20P	10
12-00231	L6-20P	20	Nylon	(C) L6-20P	10
12-00233	L5-30P	30	Nylon	US-30P	10
12-00235	L6-30P	30	Nylon	X () G	10
12-00237	L14-20P	20	Nylon	L14-20P	10
12-00239	L14-30P	30	Nylon	L14-30P	10
12-00242	50AMP	50	Nylon	50 amp	1
12-00244	5-15P	15	Nylon	5-15P	10

Nylon F	emale (Conne	ectors	េក្រ	L)us
ITEM PN#	RECEPTACLE	POWER Rating Amps	MATERIAL	NEMA	PACK QTY
12-00224	1-15R	15	Nylon	1-15R	10
12-00226	5-15R	15	Nylon	5-15R	10
12-00228	5-20R	20	Nylon	5-20R	10
12-00230	L5-20R	20	Nylon	L5-20R	10
12-00232	L6-20R	20	Nylon	L6-20R	10
12-00234	L5-30R	30	Nylon	L5-30R	10
12-00236	L6-30R	30	Nylon	L6-30R	10
12-00238	L14-20R	20	Nylon	L14-20R	10
12-00240	L14-30R	30	Nylon	L14-30R	10
12-00243	50AMP	50	Nylon	50 amp	1
12-00245	5-15R	15	Nylon	5-15R	10










Surge & Power Strips



Power Strip											
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY	
11-00223	6ft	14/3	SJT	White	6	5-15P	5-15R	15	1875	12	



Surge Ti	Surge Tri-Tap and Power Strips										
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	JOULES	PACK QTY		
11-00224	TriTap				3	5-15P	5-15R	750	12		
11-00225	4	14/3	SJT	Grey	6	5-15P	5-15R	750	12		
11-00226	6	14/3	SJT	Yellow	6	5-15P	5-15R	1050	6		
11-00227	6	14/3	SJT	Yellow	8	5-15P	5-15R	1050	6		

Household Cords



3-Outle	3-Outlet 2 Conductor SPT-2 Extension Cords												
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY			
01-00002	6ft	16/2	SPT-2	White	3	1-15P	1-15R	13	1625	25			
01-00004	9ft	16/2	SPT-2	White	3	1-15P	1-15R	13	1625	25			
01-00006	12ft	16/2	SPT-2	White	3	1-15P	1-15R	13	1625	25			
01-00008	15ft	16/2	SPT-2	White	3	1-15P	1-15R	13	1625	25			
01-00001	6ft	16/2	SPT-2	Brown	3	1-15P	1-15R	13	1625	25			
01-00003	9ft	16/2	SPT-2	Brown	3	1-15P	1-15R	13	1625	25			
01-00005	12ft	16/2	SPT-2	Brown	3	1-15P	1-15R	13	1625	25			
01-00007	15ft	16/2	SPT-2	Brown	3	1-15P	1-15R	13	1625	25			





3-Outle	3-Outlet 3 Conductor SPT-2 Extension Cords													
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY				
01-00013	8ft	16/3	SPT-2	White	3	5-15P	5-15R	13	1625	25				
01-00016	15ft	16/3	SPT-2	White	3	5-15P	5-15R	13	1625	25				
01-00012	8ft	16/3	SPT-2	Brown	3	5-15P	5-15R	13	1625	25				
01-00015	15ft	16/3	SPT-2	Brown	3	5-15P	5-15R	13	1625	25				

Workbench Cords





3-Conductor Workbench SJTW Extension Cord													
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY			
02-00034	10ft	16/3	SJTW	Black	1	5-15P	5-15R	13	1625	24			

3-Outlet Workbench SJTW Extension Cord													
ITEM PN#	CORD Length			OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY				
02-00037	6ft	14/3	SJTW	Yellow/Blue	3	5-15P	5-15R	15	1875	12			





Replacement Cords for Power Tools

Voltec's selection of power supply and replacement cords are compatible with most power tool and appliance manufacturers specifications. All of our power supply cords are UL listed with many carrying the cUL approval for Canada as well.

2 Conductor SJOW Repair Cord												
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	PLUG Type		R RATING Watts	PACK QTY				
03-00045	9ft	18/2	SJOW	Black	1-15P	10	1250	25				
03-00047	9ft	16/2	SJOW	Black	1-15P	13	1625	25				
03-00447	50ft	16/2	SJOW	Black	1-15P	13	1625	6				
03-00048	9ft	14/2	SJOW	Black	1-15P	15	1625	20				



3 Condu	3 Conductor Locking SJTW Repair Cord												
ITEM PN#	CORD Length	WIRE GAUGE	WIRE Type	WIRE Color	PLUG Type		R RATING Watts	PACK QTY					
03-00059	50ft	16/3	SJTW	Black	L5-20P	13	1625	12					



Rubber 3 Conductor SJ Repair Cords												
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	PLUG Type	POWE AMPS	R RATING Watts	PACK QTY				
03-00060	9ft	18/3	SJ	Black	5-15P	10	1250	25				
03-00062	9ft	16/3	SJ	Black	5-15P	13	1625	25				
03-00063	50ft	16/3	SJ	Black	5-15P	13	1625	6				
03-00066	9ft	14/3	SJ	Black	5-15P	15	1875	24				



Rubber	3 Con	duct	or Loc	cking SJ Re	pair C	ord	ls c((JL) ns
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	PLUG Type		R RATING Watts	PACK QTY
03-00064	9ft	16/3	SJ	Black	L5-20P	13	1625	25
03-00065	50ft	16/3	SJ	Black	L5-20P	13	1625	6







Range and Dryer SRDT Cords

At **Voltec** we stock a full line of 3 wire SRDT cords manufactured with molded on right angle plugs. The 3 wire cords are required for homes built before 1996. Choose 3 wire cords for existing installation or replacement of damaged cords. Our 3 wire cords come standard with ring connectors, in your choice of plugs rated from 30–50 amps, and are available in 4 and 6-foot lengths.



3-Wire 3	30AM	P 125/	250V	Dryer	Cord K	its with R	ing	Terminal	s (I)
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	PLUG Type	RECEPTACLE Type	P AM	OWER RATING PS watts	PACK QTY
03-00067	4ft	10/3	SRDT	Grey	10-30P	Ring Terminal	30	3750/7500	12
03-00069	6ft	10/3	SRDT	Grey	10-30P	Ring Terminal	30	3750/7500	12



3-Wire 40AMP 125/250V Range Cord Kits with Ring Terminals (
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	PLUG Type	RECEPTACLE Type		OWER RATING IPS WATTS	PACK QTY		
03-00070	4ft	8/2-10/1	SRDT	Grey	10-50P	Ring Terminal	40	5000/10000	12		
03-00072	6ft	8/2-10/1	SRDT	Grey	10-50P	Ring Terminal	40	5000/10000	12		



3-Wire	50AM	P 125/2	250V R	ange	Cord K	its with R	ing	Termina	Is 🕕
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	PLUG Type	RECEPTACLE Type		POWER RATING MPS WATTS	PACK QTY
03-00073	4ft	6/2-8/1	SRDT	Grey	10-50P	Ring Terminal	40	6250/12500	12
03-00075	6ft	6/2-8/1	SRDT	Grey	10-50P	Ring Terminal	40	6250/12500	12



4-Wire 3	BOAM	P 125/2	250V D	ryer (Cord Ki	ts with Ri	ng	Terminal	s 🕕
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	PLUG Type	RECEPTACLE Type		POWER RATING IPS WATTS	PACK QTY
03-00076	4ft	10/4	SRDT	Black	14-30P	Ring Terminal	30	3750/7500	12
03-00078	6ft	10/4	SRDT	Black	14-30P	Ring Terminal	30	3750/7500	12



4-Wire	10AM	P 125/2	50V R	ange	Cord K	its with R	ing	Termina	Is 🕕
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	PLUG Type	RECEPTACLE Type		POWER RATING IPS WATTS	PACK QTY
03-00079	4ft	8/2-10/2	SRDT	Black	14-50P	Ring Terminal	40	5000/10000	12
03-00081	6ft	8/2-10/2	SRDT	Black	14-50P	Ring Terminal	40	5000/10000	12



4-Wire 5	50AM	P 125/2	250V R	ange	Cord K	its with R	ing	Termina	Is 🕕
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	PLUG Type	RECEPTACLE Type		POWER RATING MPS WATTS	PACK QTY
03-00082	4ft	6/2-8/2	SRDT	Black	14-50P	Ring Terminal	50	6250/12500	12
03-00084	6ft	6/2-8/2	SRDT	Black	14-50P	Ring Terminal	50	6250/12500	12





Garbage Disposal/AC Power Supply Repair Cords

SPT-3 Replacement Cords

We recommend these power cords for use with electrical appliances such as garbage disposals and equipment with electrical motors that accept flat parallel wire. **Voltec's** repair cords are constructed with 3-conductor wire, and are provided to you with a choice of molded-on straight or right angle style plugs.

Heavy-Duty Power Supply Cords

Our heavy-duty power supply cords are made to replace used and worn out cords on most portable power tools. Available in 3-conductor, these cords feature molded plugs for added strength and durability. Choose from a selection of oil resistant, water resistant, or temperature resistant outer jacket compounds.


Air Conditioning/Major Appliance

3 Conductor Right Angle Plug Extension Cord ເປັນເຮ									
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	PLUG Type	RECEPTACLE Type	POWER AMPS	RATING Watts	PACK QTY
01-00041	9ft	14/3	SPT-3	Grey	5-15P	5-15R	15	1875	18



Garbage Disposal/Power Suppy Cords

3 Conductor SPT-3 Repair Cords									
ITEM PN#	CORD Length	WIRE GAUGE	WIRE Type	WIRE Color	PLUG Type	POV Amps	VER RATING Watts	PACK QTY	
03-00049	3ft	16/3	SPT-3	Grey	5-15P	13	1625	25	
03-00050	6ft	16/3	SPT-3	Grey	5-15P	13	1625	25	
03-00051	8ft	16/3	SPT-3	Grey	5-15P	13	1625	25	



3 Condu	3 Conductor Right Angle SPT-3 Replacement Cords									
ITEM PN#	CORD Length	WIRE GAUGE	WIRE Type	WIRE Color	PLUG Type	POW Amps	ER RATING Watts	PACK QTY		
03-00052	3ft	16/3	SPT-3	Grey	5-15P	13	1625	25		
03-00054	6ft	16/3	SPT-3	Grey	5-15P	13	1625	25		
03-00055	8ft	16/3	SPT-3	Grey	5-15P	13	1625	25		





2



Cord Reels

Open retractable cord reels assist in providing a well organized work area. They are available in numerous lengths and configurations for your exacting demands. Mounting hardware included.



3-Outl	et R	etrac	table	Reel	with In	door !	Style I	Recepta	icles	c (ÜL) us
ITEM PN#	REEL Type	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	POWER RAT		PACK QTY
07-00282	2	30ft	16/3	SJTW	Yellow	3	5-15P	5-15R	10 12	50	4
•	Heavy Duty Metal Reel Mounting Hardware Included										



								PR	O SE	RIES pro	oduct
3-Outle	et R	etrac	table	Reel	s with (Outdo	or Sty	le Rece	pta	cles	
ITEM PN#	REEL Type	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY
07-00283	3	50ft	14/3	SJTW	Yellow	3	5-15P	5-15R	13	1625	2
07-00284	3	50ft	12/3	SJTW	Yellow	3	5-15P	5-15R	15	1875	2
3-Way WMounting5-Locking3-Outlet	g Hard g Positi	ware Incl		t			SV.	CKING POSITI	TIONS	}	

UNDERSTANDING THE CHANGING WORLD OF

Convenient Carry HandleResettable Circuit Breaker



Choosing an LED technology is like choosing the right winter coat to wear: there are different models that provide more or less features depending on what you might need. Once you decide the features you want from your LED, you can easily choose the package type accordingly. The "package type" refers to the way an LED's semiconductor die—similar to the filament in an incandescent—is packaged inside LED devices for different applications.








UNDERSTANDING THE CHANGING WORLD OF LED




SMD (SURFACE MOUNTED DEVICE)

The SMD chips, or "Surface Mounted Device" chips, have become very popular due to their versatility. This SMD is very powerful for color combinations, as opposed to the DIP technology, which can only display one color per device. The technology does not take the bullet shaped design from DIP LEDs, and is closer to that of a flat, square computer chip. These chips are much smaller in comparison to the

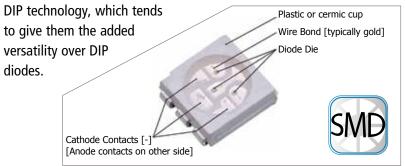


COB (CHIP ON BOARD)

The most recent LED development has been "Chip On Board" or COB technology. COB and SMD can be similar because like SMD, COB chips have multiple diodes on the



same "wafer" or chip. However, this is where the similarities end. In fact, on every COB chip there are multiple diodes; typically 9 or more. The other big difference between COB and SMD technology lies in the fact that while SMD requires a circuit for every diode included on the chip, COB devices only have 1 circuit and 2 contacts for the entire chip regardless of the number of diodes. This single circuit design, regardless of the number of diodes on the chip, leads to simplicity for the rest of any COB LED device. Perhaps even more important than the simplicity aspect, COB also leads to improved lumen-per-watt ratios in comparison to other LED technologies such as DIP and SMD.

(DUAL IN-LINE PACKAGE)



Dual In-Line Package LED (DIP) technology has been around for more than 50 years, and is likely what you think of when you picture an LED. Though it is old, DIP LEDs are far from outdated as they are still used extensively today for large signs and displays. The widespread use of DIP LEDs came about due to their long life-span and intense brightness. DIP LEDs are highly recognizable by their "pill" or "bullet" shaped design (≤5mm wide), and the long contacts that extend from the bottom of the LED which can be easily soldered or inserted into a bread board.



Site Source Reference - http://www.hitlights.com/blog/comparison-and-differences-between-led-technologies-dip-vs-smd-vs-cob-vs-mcob/









LED Lights





3 Watt L	. <mark>ED</mark> Aluminun	n Pen	Light	PRO SERIES product
ITEM PN#	LUMEN		BATTERY TYPE	PACK QTY
08-00617	220		(3x) AAA Included	12
High Power	COB LED Light		Heavy Duty Aluminum Housir	ng COP
Heavy Duty	Magnetic Pocket Clip)		COB



Tactical LED Flash Light with Pocket Clip								
ITEM PN#	ITEM PN# LUMEN BATTERY TYPE							
08-00618	08-00618 120 (1) AA Included 12							
• Super Brigh	t High Power LED		Stainless Steel Clip					
• Rated IP66 Water Resistant • Uses 1 AA Battery (Included)								
Super Bright White Light with Low Heat Output								



8 Watt Telescopic LED Work Light with Spot Light								
ITEM PN#	LUMEN		BATTERY TYPE	PACK QTY				
08-00622	150	(3x) AAA (not included) 12						
High Power SMI	D LED		• 90° Degree Angle Head					
• Telescopes Automatic On/Off • Magnetic Base								
Super Bright White Light with Low Heat Output								



High Po	wer Hands-I	lead Lamp	PRO SERIES product				
ITEM PN#	LUMEN	BA	PACK QTY				
08-00693	600	(3x) A	AA (Included)	6			
• 5 Light Sett	tings (Hi/Med/Low/F	lash/SOS)	Barrel Attachment				
• 4 Color Ligi	ht Filters		Heavy Duty Adjustab	le Headstrap			
Aerospace	Grade Aluminum Bo	dy	Adjustable Settings f	or Light Direction			
Super Bright White Light with Low Heat Output							



High Po	wer Hands-l	lead Lamp	PRO SERIES product					
ITEM PN#	LUMEN	BA	ATTERY TYPE	PACK QTY				
08-00692	120	(3x) A	AA (Included)	6				
• Super Brigh	nt High Power 3W C	OB LED	Adjustable Head Lan	np for Light Direction				
• 3 Light Sett	tings (Hi/Low/Flashi	ng)	• Uses 3 AAA Replace	able Batteries				
Super Bright White Light with Low Heat Output								





30 Elem	ent <mark>LED</mark> Screw In	Module	PR	SERIES product
ITEM PN#	LUM	PACK QTY		
08-00620	500	0		6
• High Power	SMD LED	• Low Heat Output		CMD
• Easily Conv	erts Trouble Light to LED	• Convenient Hang	ing H	ook SIVID
• Super Brigh	t White Light with Low Hea	t Output		












LED Lights





3 Watt	LED Aluminum	Work Light	PRO SERIES product				
ITEM PN#	LUMEN		BATTERY Type				
08-00624	250/300	(4)	(4) AAA Not Included				
High Pow	er COB LED	• 250	Lumen Telescopic Body Light or	n Low			
• 300 Lume	n Spot Light	• Hea	g COR				
• 300 Lume	n Telescopic Body Light o	n High • Ma	gnetic Base	COB			



3 Watt	Recha	rgeable LED V	Vork	Light	PR	O SERIES p	roduct
ITEM PN#	LUMEN	BATTERY Type	LED LIFE Span	RUN Time	CHARGE Time	PACK QTY	
08-00626	300	3.7V Lithium Recharg	geable	50,000 hours	2	4	6
Super Brig	ght High P	ower COB LED	• Conj	unction Pivots 80°			
• Includes A	C/DC Cha	rger	• Hool	k Twists 360° and P	ivots 180	° 6	OB
• Light Hea	d Twists 1	80°	• Mag	netic Base			



5 Watt	LED H	andhe	ld Wo	rk Ligl	ht	PRO SERIES	product
ITEM PN#	LUMEN	CORD Length	GAUGE	WIRE Type	WIRE Color	PLUG Type	PACK QTY
08-00627	500	6ft	18/2	SJT	Black	1-15P	6
Super Brig	ght High P	ower COB	LED Ligh	t	ON/OFF Buttor	with Indicator Light	COP
Hanging I	Hook & He	avy Duty	Magnet o	n Back	Solid Non-Slip	Grip	COB



3 Watt	Recha	rgeable <mark>LED</mark> W	Vork	Light	PRO	SERIES p	roduct
ITEM PN#	LUMEN	BATTERY Type		LED LIFE Span	RUN Time	CHARGE Time	PACK QTY
08-00628	350	3.7V Lithium Recharg	jeable	50,000 hours	4	4	6
• 100 Lume	n Spotligh	it	• Mag	net on Base and B	ack of Light	t	
• 350 Lume	n Body Lig	ght	• Dual	Twisting Hanging	Hooks	60	OB
• Durable R	ubber Hoเ	ısing	• IP54	Rated		6	



10 Wat	t AC LI	ED Wor	k Ligh	t with C	outlet	in Hand	dle <i>PRO</i> SERIES	product
ITEM PN#	LUMEN	CORD Length	GAUGE	WIRE Type	WIRE Color	PLUG Type	LED LIFE Span	PACK QTY
08-00629	1200	6ft	16/3	SJTW	Black	5-15P	50,000 hours	6
• 10 Watt H	ligh Power	COB LED		Magnet	on Back a	and Hangin	g Hook	600
Grounded	Outlet in	Handle		• Super B	right Whit	e Light wit	h Low Heat Output	COB





28







LED Lights





15 Wat	t Rech	argeable LED	Wor	k Light	(l) (P)	? O SERIES p	oroduct
ITEM PN#	LUMEN	BATTERY Type		LED LIFE Span	RUN TIME in Hours	CHARGE Time	PACK QTY
08-00600	800	3.7V 8800mAh Li	on	50,000 hours	4-Hi 6-Lo	5hrs	4
• 15 Watt H	ligh Power	COB LED	• 2A l	JSB Power Bank			
• AC and U	SB Ports		• Mag	netic Base			COB
• Rugged a	nd Shock I	Resistant					
• 60° Degre	e Swivel V	Vater Resistant Lamp H	ead IP54	4			





							Ph O SEKII	-S product			
Multi-Service Rechargeable LED Light Bar											
ITEM PN#	LUMEN		BATTER	TYPE		AC PLUG Type	LED LIFE Span	PACK QTY			
08-00688	1250		4000MA	H 3.7V		1-15P	50,000 hours	2			
• Foam Cov	ered Hand	lles Extend C	out 52"-	• Alum	inum Body a	nd ABS Co	nstruction				
High Pow	er 120 SM	D LED Lights	;	• AC/D	C Power Ada	pter & Car	Charger Included	SMD			
• 3-Way Lig	• 3-Way Light-Hi/Med/Red Alert Flashing • Hidden Support Legs Convert Light to Tri-Stand										











LED Light with Cord Reel



OUTLET IN HANDLE

								PR	O SE	RIES pr	oduct
Retractable Cord Reel with 10 Watt LED Work Light										(ÎL)	
ITEM PN# LUMEN CORD WIRE WIRE WIRE COLOR						OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY
07-00260	1200	50ft	16/3	SJTW	Yellow	1	5-15P	5-15R	10	1250	2
• Outlet in • Dual Han		oks				Magnet Circuit I		otected		6	OB









PRO SERIES LED Work Lights

12 Wat	t Rech	argeable LED	Worl	k Light	(L) P/	? O SERIES p	product		
ITEM PN#	LUMEN	BATTERY Type		LED LIFE Span	RUN Time	CHARGE Time	PACK QTY		
08-00717	1500	Lithium Rechargea	ble	50,000 hours	2	2.5	2		
• Lithium R	echargeab	le Batteries	• Supe	er Bright White Ligh	nt with Low He	eat Output			
• 12 Watt H	ligh Power	COB LED	• Quic	k Head Adjustment	t		COB		
• 100% Die	Cast Alun	ninum Housing	• On/0	Off Switch					
Replacement Charger and Batteries Available - See page 45.									



14 Watt AC LED Portable Work Light							PRO SERIES	oroduct
ITEM PN#	LUMEN	CORD Length	GAUGE	WIRE Type	WIRE Color	PLUG Type	LED LIFE Span	PACK QTY
08-00718	1100	3ft	18/3	SJTW	Black	5-15P	50,000 hours	2
• 14 Watt H	igh Power	COB LED		• Super B	right White	e Light wit	h Low Heat Output	
• 100% Die	Cast Alun	ninum Housii	ng	• Compac	t Design			COB
• On/Off Sw	vitch			• Quick H	ead Adjus	tment		



22 Wat	t AC L	ED Port	able \	Nork Li	ght		PRO SERIES	product
ITEM PN#	LUMEN	CORD Length	GAUGE	WIRE Type	WIRE Color	PLUG Type	LED LIFE Span	PACK QTY
08-00719	1900	3ft	18/3	SJTW	Black	5-15P	50,000 hours	2
• 22 Watt H	ligh Powei	r COB LED		• Super B	right Whit	e Light wit	h Low Heat Output	
• 100% Die	Cast Alur	ninum Housi	ng	Compact	t Design			COB
• On/Off Sw	<i>i</i> itch			• Quick H	ead Adjus	tment		



44 Wat	t AC LI	ED Port	able V	Vork Lig	ght		PRO SERIES	oroduct		
ITEM PN#	LUMEN	CORD Length	GAUGE	WIRE Type	WIRE Color	PLUG Type	LED LIFE Span	PACK QTY		
08-00720	4200	3ft	18/3	SJTW	Black	5-15P	50,000 hours	2		
• 44 Watt H	ligh Power	COB LED		• Super B	• Super Bright White Light with Low Heat Output					
• 100% Die	Cast Alun	ninum Housii	ng	Compact	t Design			COB		
• On/Off Sw	/itch			• Quick H						



88 Wat	t AC D	ual LED	Tripo	d Wo	rk Light	(PRO SERIE	S product		
ITEM PN#	LUMEN	CORD Length	GAUGE	WIRE Type	WIRE Color	PLUG Type	LED LIFE Span	PACK QTY		
08-00716	8400	5ft	18/3	SJTW	Black	5-15P	50,000 hours	2		
• 88 Watt D	ual High F	ower COB L	EDs	• Rugg	• Rugged Diecast Aluminum Housing & Face Frame					
• 2 in 1 Ren	noveable I	H-Base		• Exte	Extendable Tripod with Extension Leg					
• Quick Hea	d Adjustm	ent		• 2 - 0	• 2 - On/Off Switches					



All LED Work Lights feature Easy Quick-Head Adjustment









PRO SERIES LED Work Lights



44 Wat	t AC L	ED Trip	od Wo	ork L	ight		۱۹۱۱	us PRO SERIES p	oroduct
ITEM PN#	LUMEN	CORD Length	GAUGE		WIRE Type	WIRE Color	PLUG Type	LED LIFE Span	PACK QTY
08-00721	4200	5ft	18/3	SJTW		Black	5-15P	50,000 hours	2
• 44 Watt H	ligh Powe	r COB LED			• 100% D	ie Cast Al	uminum Ho	ousing/Face Frame	COP
• Tool-Free	Quick Hea	d Adjustmen	t		• LED Ref	l Coating	COD -		



On/Off Switch

2 in 1 FEATURE Removable H-Base



Tool-Free Quick-Head Adjustment

• Super Bright Cool White Light with Low Heat Output



12 Wat	t AC LI	ED 4 IN	1 Hai	ngin	g Work	Light	î (Î)	PRO SERIES pr	oduct	
ITEM PN#	LUMEN	CORD Length	GAUGE	WIRE Type		WIRE Color	PLUG Type	LED LIFE Span	PACK QTY	
08-00722	900	3ft	18/3	9	SJTW	Black	5-15P	50,000 hours	2	
• 12 Watt H	igh Power	COB LED			• 100% Die Cast Aluminum Housing/Face Frame					
Interchange	Interchangeable - H-Base/Clamp/Magnet					ector with	Metalized	Coating	COR	
• On/Off Sw	/itch				• Super Br	right Neut	ral Light wi	th Low Heat Output		

Incandescent Trouble Lights

Voltec incandescent worklights provide durability and practicality. Constructed from tough PVC, these lights can withstand the rigors of a tough work environment.



Plastic Shade Work Lights											
ITEM PN#	CORD Length	WIRE GAUGE	WIRE Type	WIRE Color	BULB Rating	PLUG Type	PACK QTY				
08-00256	6ft	18/2	SJT	Yellow	75	1-15P	4				
08-00181	25ft	18/2	SJT	Yellow	75	1-15P	4				



Metal Shade Work Lights											
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	PLUG Type	BULB RATING	PACK QTY				
08-00257	25ft	18/3	SJT	Yellow	5-15P	75	4				
08-00258	50ft	18/3	SJT	Yellow	5-15P	75	6				





Incandescent Trouble Lights

Metal Shade Work Light with Outlet in Handle												
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	BULB RATING	PACK QTY			
08-00183	6ft	16/3	SJT	Yellow	1	5-15P	5-15R	75	4			
08-00184	25ft	16/3	SJT	Yellow	1	5-15P	5-15R	75	4			
08-00185	50ft	16/3	SJT	Yellow	1	5-15P	5-15R	75	6			














Incandescent Trouble Lights with Retractable Reels

Voltec's incandescent retractable reels are constructed of tough ABS or heavy duty steel and mount easily for use in any work environment. Mounting hardware included.





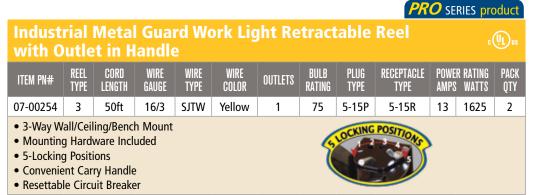









Fluorescent Retractable Reels

Voltec's fluorescent retractable reels are constructed of tough ABS or heavy duty steel and mount easily for use in any work environment. Mounting hardware included.



	PRO SERIES product													
13 Watt Fluorescent Angle Light Retractable Reel and Outlet in Handle														
ITEM PN#	REEL Type	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS						PACK QTY		
07-00249	2	35ft	16/3	SJTW	Yellow	1	13w	5-15P	5-15R	10	1250	4		
• Magnet Included • Mounting Hardware Included														

Fluorescent Retractable Reels



											inico più	Jauce	
13W Fluorescent Angle Light Retractable Reel with Magnet and Outlet in Handle													
ITEM PN#	REEL Type	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	BULB Rating	PLUG Type	RECEPTACLE Type				
07-00250	3	50ft	16/3	SJTW	Yellow	1	13w	5-15P	5-15R	10	1250	2	
3-Way Wall/Ceiling/Bench Mount Mounting Hardware Included Resettable Circ Resettable Circ													

Fluorescent Work Lights

Fluorescent – Cold to the touch and energy efficient, our fluorescent work lights come in 13 and 26-watt tube and angle styles. The units are equipped with SVT, SJT, and SJTW cords. These lights are available with 2 and 3-conductor plugs. Some lights are also available with 3-conductor grounding outlets in the handles. All lights utilize a standard 13-watt compact fluorescent bulb, which is included with each fixture, (the 26 watt accepts two 13 watt bulbs). Our fluorescent work lights are UL and cULus approved.



13 Watt Compact Fluorescent Tube Light											
ITEM PN#	CORD WIRE GAUGE WIRE WIRE BULB PLUG LENGTH WATTS TYPE										
08-00264	25ft	18/2	SJT	Yellow	13	1-15P	6				

Professional Fluorescent Worklights

Designed to provide maximum lighting for the working professional. A durable compact casing to manuever into the most tighest of spots. Ergonomic handle makes it quite comfortable for lengthy hold times. Hang light using one of the dual rotating hooks positioned on either end gaining all-way positioning.

PRO SERIES product



• Dual Rotating Hooks





PRO SERIES product 13 Watt Compact Fluorescent Angle Light with Outlet in Handle WIRE Gauge CORD WIRE WIRE PLUG RECEPTACLE PACK ITEM PN# **OUTLETS BULB RATING** LENGTH TYPE QTY TYPE 08-00207 6ft 16/3 SJT Yellow 1 5-15P 5-15R 13 4 08-00268 25ft 16/3 SJT Yellow 5-15P 5-15R 13 6 Dual Rotating Hooks • Magnet in Handle on 08-00268 only.



26 Watt Electronic Compact Fluorescent Angle Light with Outlet in Handle WIRE Gauge CORD WIRE COLOR RECEPTACLE ITEM PN# **BULB RATING OUTLETS** LENGTH TYPE TYPE TYPE QTY 08-00270 5-15P 5-15R 25ft 16/3 SJT Yellow 26 (2x13) 6

• Magnet in Handle

Halogen Work Lights



• Bulb(s) Included



- S-Style Base
- Insulated Foam Handles
- Bulb(s) Included

Haloger	Halogen Tripod Work Light												
ITEM PN#	MAX Wattage	CORD Length	WIRE GAUGE	WIRE Type	WIRE COLOR	PLUG Type	ON/OFF Switch	PACK QTY					
08-00211	1000	3ft	18/3	SJTW	Black	5-15P	Yes	2					
	Extendable Tripod Bulb(s) Included												



For Replacement Parts & Bulbs Available, See Page 45
















Heavy Duty Halogen Work Lights



						PRO	SERIES pr	oduct	
Heavy D	uty H	k Light			c (UL) us				
ITEM PN#	MAX Wattage	CORD Length	WIRE GAUGE	WIRE Type	WIRE Color	PLUG Type	ON/OFF Switch	PACK QTY	
08-00609	500	3ft	18/3	SJTW	Black	5-15P	Yes	6	
H-Base DesHeavy Duty	9	nes		Insulated Foam HandlesBulb(s) Included					



Our Halogen Tripod Work Light Features The Removable

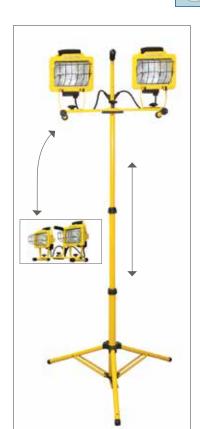





2 in 1 FEATURE Removable H-Base











Dusk to Dawn Security Lighting

Voltec's Dusk to Dawn Lights are perfect for lighting dark, secluded areas. They are manufactured with corrosion resistant die cast aluminum housing and an optional mounting arm is available. We offer them in four different styles, Fluorescent, Metal Halide, High Pressure Sodium and the latest technology, LED. Some applications for these lights include barns, side roads, pathways, or any other place where dependable security light is needed. No matter what your need, **Voltec's** Dusk to Dawn Security lights have you covered.

70W Me	tal Ha	lide Sed	urity	Light			ULus	
ITEM PN#	MAX Wattage	LIGHT Color	BALLAST	BULB Type	REFLECTOR SIZE	OPTIONAL Arm	PACK QTY	
08-00432	70	White	120V	70W Metal Halide	10"	Yes	4	
• 70 Watt Me • 10" alumin			ic lens	120 V Electronic Ballast with CDS Photocell Replaceable Twist-Lock Photocell				



65W Flu	oresce			us JUL				
ITEM PN#	MAX Wattage	LIGHT Color	BALLAST	BULB Type	REFLECTOR SIZE	OPTIONAL Arm	PACK QTY	
08-00434	65	White	120V	65W Fluorescent	10"	Yes	4	
• 65 Watt CF	•	•	ic lens	120 V Electronic Ballast with CDS Photocell 65W Compact Fluorescent Bulb Included				



70W Hig	h Pre	ssure S	odium S	ecurity Light			(UL) us
ITEM PN#	MAX Wattage	LIGHT Color	BALLAST	BULB Type	REFLECTOR Size	OPTIONAL ARM	PACK QTY
08-00435	70	Amber	120V/60HZ	65W Fluorescent	10"	Yes	4
 70 Watt HPS Bulb Included 10" aluminum reflector with acrylic lens 				120V/60HZ Electronic Ballast Replaceable Twist-Lock Photocell			



150W Hi	gh Pro	essure	Sodium !	Security Ligh	c (UL) us		
ITEM PN#	MAX Wattage	LIGHT Color	BALLAST	BULB Type	REFLECTOR SIZE	OPTIONAL Arm	PACK QTY
08-00436	150	Amber 120V/60HZ		150W HPS	12"	Yes	2
150 Watt HPS Bulb Included 12" aluminum reflector with acrylic lens				120V/60HZ Electronic Ballast Replaceable Twist-Lock Photocell			









Dusk to Dawn



100W M	letal H	alide S	Security	Light			
ITEM PN#	MAX Wattage	LIGHT Color	BALLAST	BULB Type	REFLECTOR SIZE	OPTIONAL Arm	PACK QTY
08-00437	100	White	120V	100W Metal Halide	12"	Yes	2
• 100 Watt N • 12" Alumin				• 120V Ballast • Replaceable Twis	t-Lock Phot	ocell	



150W Pulse Start Metal Halide Security Light								
ITEM PN#	MAX Wattage	LIGHT Color	BALLAST	BULB Type	REFLECTOR SIZE	OPTIONAL Arm	PACK QTY	
08-00438	150	White	120V 150W Metal Halide		12"	Yes	2	
• 150 Watt M				• 120V Ballast • Replaceable Tw	rist-Lock Ph	otocell		

LED Dusk to Dawn



Super Bright White Light With Low Heat Output & Lightweight



33W, 4200 Lumen COB LED Security Light									
ITEM PN#	LUMEN	MAX Wattage	LIGHT Color	INPUT Voltage		BULB Type	REFLECTOR SIZE	OPTIONAL Arm	PACK QTY
08-00450	4200	33	White	120-277V		COB	Sealed	Yes	4
33W COB LAcrylic PrisrAluminum I	matic Refl	ector	oating Fins			 120-277VAC 50 Durable Polyes Replaceable Tw 	ter Power C		OV)



Extension Arm for Security Lighting							
ITEM PN#	LENGTH	DESCRIPTION	PACK QTY				
08-00431	21"	Extension Arm with Mounting Hardware Included	12				





Booster Cables

Voltec offers a full line of durable booster cables. These cables are resistant to extreme temperatures, oil and chemicals. They are available in medium-duty 10 and 8 AWG as well as heavy-duty 6 and 4 AWG, and extra-heavy duty 2 AWG. We offer these in a variety of lengths to match every need.

Booste	r Cab	les			
ITEM PN#	GAUGE	CORD Length	WIRE COLOR	CLAMP TYPE	PACK QTY
10-00224	10	12ft	Red/Black	Light Duty Clamp	6
10-00273	8	12ft	Yellow/Black	Medium Duty Side/Top Clamp	6
10-00275	6	16ft	Orange/Black	Medium Duty Side/Top Clamp	6
10-00307	4	16ft	Blue/Black	Medium Duty Side/Top Clamp	6




PRO Bo	oste	r Cabl	es	PRO SERIES P	oroduct
ITEM PN#	GAUGE	CORD Length	WIRE COLOR	CLAMP TYPE	PACK QTY
10-00277	4	20ft	Blue/Black	Heavy Duty Parrot Jaw Clamp	4
10-00276	2	20ft	Black	Heavy Duty Parrot Jaw Clamp	2



Comme	ercial	Grade	Booster Cable	PRO SERIES	oroduct
ITEM PN#	GAUGE	CORD Length	WIRE COLOR	CLAMP TYPE	PACK QTY
10-00320	1	25ft	Red/Black	Heavy Duty Industrial Clamp	4









Replacement Booster Clamps										
ITEM PN#	CLAMP Rating	CLAMP TYPE	PACK QTY							
10-00301	400Amp Clamp (Pair)	Medium Duty Side/Top Clamp	12							
10-00302	500Amp Clamp (Pair)	Heavy Duty Parrot Jaw Clamp	12							
10-00303	800Amp Clamp (Pair)	Heavy Duty Industrial Clamp	12							











RV Adapters with





Voltec's Power and Lighting's Patented E-ZEEGRIP™ series combines quality power products with innovative features that make using your RV cords and adapters easier to use! Our handle is large and ergonomic for a comfortable grip, and is replaceable. The handle sits flat into junction boxes enabling it to close completely for safety.







VOLTEC **Offering** the Smart Choice

- ► UL and cUL approvals (where applicable) for a product you can trust
- Ergonomic Design Allows for **Easier Grip**
- Replaceable Nylon Handle
- **Handle Folds Down to Fit Flush** with Electrical Enclosures

COMPARE













15-30 A	MP A	dapto	er wit	th E-ZEE <mark>G</mark>	RIP		PR	O SERIE	S pro	oduct
ITEM PN#	CORD Length	WIRE GAUGE	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	POWER RA		PACK QTY
16-00502	12in	10/3	STW	Blue/Yellow	1	5-15	TT-30	15 18	375	10




30-15 A	MP A	dapto	er wit	th E-ZEE <mark>G</mark>	RIP™		PR	O SERIES pr	oduct
ITEM PN#	CORD Length	WIRE GAUGE	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	POWER RATING AMPS WATTS	PACK QTY
16-00503	12in	10/3	STW	Blue/Yellow	1	TT-30	5-15	15 1875	10



30-50 A	MP A	dapto	er wit	th E-ZEE <mark>G</mark>	RIP™	ı	PR	O SE	RIES pro	oduct
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY
16-00504	18in	10/3	STW	Blue/Yellow	1	TT-30	14-50	30	3750	10



50-30 A	50-30 AMP Adapter with E-ZEE GRIP TM PRO SERIES product											
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY		
16-00505	18in	10/3	STW	Blue/Yellow	1	14-50	TT-30	30	3750	10		



30 AMP	Gene	rator	Adap	ter with	7444	GKIP	TM PR	O SERIES	product
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	POWER RATIN	
16-00506	18in	10/3	STW	Blue/Yellow	1	L5-30	TT-30	30 375	10
16-00526	18in	10/3	STW	Blue/Yellow	1	L14-30	TT-30	30 375	10

For additional Generator Adapters see page 14.







RV Adapters & Extension Cords with







50 AMI	P RV E	xtensi	rd with	E-7/EI	GRIP	ТМ		C	(ŪL) us	
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	10111	R RATING Watts	PACK QTY
16-00510	15ft	6/3-8/1	STW	Blue/Yellow	1	14-50	14-50	50	12500	2
16-00511	30ft	6/3-8/1	STW	Blue/Yellow	1	14-50	14-50	50	12500	1



RV Locking Extension Cords

with **EZEEGRIP**™



RV Extension Cord with Locking Tight Female Receptacle

LOCKING 30 AMP & 50AMP RECEPTACLES

C (Jr) nz

PRO SERIES product

ITEM PN#	CORD Length	WIRE GAUGE	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	PACK QTY
16-00584	25ft	10/3	STW	Blue/Yellow	1	TT-30	L5-30	2
16-00585	35ft	10/3	STW	Blue/Yellow	1	TT-30	L5-30	2
16-00586	25ft	6/3-8/1	STW	Blue/Yellow	1	14-50	SS2-50	2
16-00587	35ft	6/3-8/1	STW	Blue/Yellow	1	14-50	SS2-50	2
RV Con	versio	n Cords v	with Lo	cking Tight	: Fema	ile Rec	eptacle	
16-00588	25ft	10/3	STW	Blue/Yellow	1	TT-30	SS2-50	2
16-00589	25ft	10/3	STW	Blue/Yellow	1	14-50	L5-30	2



RV Locking Adapters with

RV Adapters with Locking Tight Female Receptacle											
16-00590	2ft	10/3	STW	Blue/Yellow	1	TT-30	L5-30	10			
16-00591	2ft	10/3	STW	Blue/Yellow	1	TT-30	SS2-50	10			
16-00592	2ft	10/3	STW	Blue/Yellow	1	5-15	L5-30	10			
16-00593	2ft	10/3	STW	Blue/Yellow	1	5-15	SS2-50	10			



RV Locking Molded Adapters

Heavy Duty Molded Adapters										
ITEM PN#	OUTLETS	PLUG Type	RECEPTACLE Type	PACK QTY						
16-00594	1	5-15	L5-30	10						
16-00595	1	TT30	L5-30	10						
16-00596	1	5-15	SS2-50	10						
16-00597	1	TT30	SS2-50	10						











RV Plan-O-Grams

Voltec Power and Lighting's E-ZEEGRIP™ Cord and Adapters set provides a complete electrical offering in a convenient display. This E-ZEEGRIP™ set combines a full selection of electrical cords and adapters as well as a few features to make the shopping experience easy! Voltec's E-ZEEGRIP™ set works well as an end cap or as stand alone display.

Voltec Premium Retail Set - PN# 16-02000 Includes the following:

VOILCE	TEITHUITI NETAIL JET - PN# 16-02000 Includes the fo	nowing.
PN#	Description	Set Qty
16-00500	15M-30F Round Park Adapter	10
16-00501	30M-15F Round Park Adapter	10
16-00502	1Ft 15M-30F Dog Bone Adapter w/ E-ZEEGRIP Handle	3
16-00503	1Ft 30M-15F Dog Bone Adapter w/ E-ZEEGRIP Handle	3
16-00504	18 In 30M-50F Dog Bone Adapter w/ E-ZEEGRIP Handle	3
16-00505	18 In 50M-30F Dog Bone Adapter w/ E-ZEEGRIP Handle	3
16-00506	18 In 30 Amp 3 Prong Generator Adapter w/ E-ZEEGRIP Handle	3
16-00526	18 In 30 Amp 4 Prong Generator Adapter w/ E-ZEEGRIP Handle	3
16-00548	Replacement Ezeegrip Handle For 30 Amp Cords	5
16-00549	Replacement Ezeegrip Handle For 50 Amp Cords	5
16-00590	2 Ft 30M-50F Locking Dog Bone Adapter w/ E-ZEEGRIP Handle	3
16-00591	2 Ft 50M-30F Locking Dog Bone Adapter w/ E-ZEEGRIP Handle	3
16-00592	2 Ft 15M-30F Locking Dog Bone Adapter w/ E-ZEEGRIP Handle	3
16-00552	1 Ft 15M-30F Dog Bone Adapter	10
16-00553	1 Ft 30M-15F Dog Bone Adapter	10
16-00554	18 In 30M-50F Dog Bone Adapter	10
16-00555	18 In 50M-30F Dog Bone Adapter	10
16-00558	25 Ft 30 Amp RV Extension Cord	4
16-00508	25 Ft 30 Amp RV Extension Cord w/ E-ZEEGRIP Handle	2
16-00584	25 Ft 30 Amp Locking RV Extension cord w/ E-ZEEGRIP Handle	2
16-00561	30 Ft 50 Amp RV Extension Cord	2
16-00511	30 Ft 50 Amp RV Extension Cord w/ EZEEGRIP handle	2
16-00586	25 Ft 50 Amp Locking RV Extension Cord w/ E-ZEEGRIP Handle	2



- E-ZEEGRIP Display Sign
- Re-order Hang Tags
- Wire Baskets for Traditional Adapters

Voltec Standard Retail Set - PN# 16-01000 Includes the following:

PN#	Description	Set Qty
16-00500	15M-30F Round Park Adapter	10
16-00501	30M-15F Round Park Adapter	10
16-00502	1Ft 15M-30F Dog Bone Adapter w/ E-ZEEGRIP Handle	3
16-00503	1Ft 30M-15F Dog Bone Adapter w/ E-ZEEGRIP Handle	3
16-00504	18 In 30M-50F Dog Bone Adapter w/ E-ZEEGRIP Handle	6
16-00505	18 In 50M-30F Dog Bone Adapter w/ E-ZEEGRIP Handle	3
16-00506	18 In 30 Amp 3 Prong Generator Adapter w/ E-ZEEGRIP Handle	3
16-00526	18 In 30 Amp 4 Prong Generator Adapter w/ E-ZEEGRIP Handle	3
16-00548	Replacement Ezeegrip Handle For 30 Amp Cords	5
16-00549	Replacement Ezeegrip Handle For 50 Amp Cords	5
16-00552	1Ft 15M-30F Dog Bone Adapter	10
16-00553	1Ft 30M-15F Dog Bone Adapter	10
16-00554	18 In 30M-50F Dog Bone Adapter	10
16-00555	18 In 50M-30F Dog Bone Adapter	10
16-00558	25 Ft 30 Amp RV Extension Cord	4
16-00508	25 Ft 30 Amp RV Extension Cord w/ E-ZEEGRIP Handle	2
16-00561	30 Ft 50 Amp RV Extension Cord	2
16-00511	30Ft 50 Amp RV Extension Cord w/ E-ZEEGRIP Handle	2



- E-ZEEGRIP Display Sign
- Re-order Hang Tags
- PDQ Tray Packs for Adapters






RV Adapters


Voltec Power and Lighting has over ten years of distribution experience and draws strength from over twenty years of manufacturing. Our commitment to quality has earned us both ISO 13485 and ISO 9001 ratings for quality control and excellence in manufacturing. We are also a UL registered firm, with products listed for UL, cUL, and ULus. Voltec Power and Lighting reaches into professional markets for PRO users in many categories, giving us a broad product offering for both the front of the store, into service areas.

Voltec Power and Lighting manufactures a full line of RV products, from molded adapters and cords to inverters and generator adapters. Our patented E-ZEEGRIP® series offers a premium product to customers with ungraded features at a great price. Our point of purchase displays and NEW E-ZEEGRIP® set make marketing easy! This year, Voltec introduces our new line of RV locking products with our patented E-ZEEGRIP® handle.

Park Adapters									
ITEM PN#	# OUTLETS PLUG RECEPTACLE PACK Type type Qty								
16-00500	1	5-15	TT-30	10/100					
16-00501	1	TT-30	5-15	10/100					
16-00550	1	5-15	TT-30	10/100					
16-00551	1	TT-30	5-15	10/100					
Park G	enera	tor Ada	apter						
16-00516	1	L5-30	TT-30	10/50					
16-00517	1	L14-30	TT-30	10/50					
For add	litional Ge	enerator Ad	apters see p	age 14.					







	30 & 50 AMP Replacement Heads						
ITEM PN#	DESCRIPTION	PACK QTY					
16-00580	Male TT-30 Replacement Head	10/50					
16-00581	Female TT-30 Replacement Head	10/50					
16-00578	Male 14-50 Replacement Head	10/50					
16-00579	Female 14-50 Replacement Head	10/50					



Flat Wire Adapters										
ITEM PN#	CORD Length	GAUGE	PLUG Type	RECEPTACLE Type	PACK QTY					
16-00568	12in	10/3	5-15	TT-30	10					
16-00569	12in	10/3	TT-30	5-15	10					
16-00570	18in	10/3	TT-30	14-50	10					
16-00571	18in	10/3	14-50	TT-30	10					



Fax: 1-909-606-0281







RV Adapter and Extension Cords Traditional Series



15-30	15-30 AMP Adapter													
ITEM PN:	# CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY				
16-005!	52 12in	10/3	STW	Black	1	5-15	TT-30	15	1875	10				



30-15 A	30-15 AMP Adapter													
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY				
16-00553	12in	10/3	STW	Black	1	TT-30	5-15	15	1875	10				



30-50 AMP Adapter												
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY		
16-00554	18in	10/3	STW	Black	1	TT-30	14-50	30	3750	10		



50-30 A	50-30 AMP Adapter													
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type		R RATING Watts	PACK QTY				
16-00555	18in	10/3	STW	Black	1	14-50	TT-30	30	3750	10				



30 AMP and 50 AMP RV Extension Cord												
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	RECEPTACLE Type	POWE AMPS	R RATING Watts	PACK QTY		
16-00557	10ft	10/3	STW	Black	1	TT-30	TT-30	30	3750	4		
16-00558	25ft	10/3	STW	Black	1	TT-30	TT-30	30	3750	2		
16-00559	50ft	10/3	STW	Black	1	TT-30	TT-30	30	3750	1		
16-00561	30ft	6/3-8/1	STW	Black	1	14-50	14-50	50	12500	2		

RV Power Supply Cords



30 AMP Right Angle Power Supply Cord													
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type		POWER RATING AMPS WATTS					
16-00562	25ft	10/3	STW	Black	1	TT-30	30	3750	2				
16-00566	35ft	10/3	STW	Black	1	TT-30	30	3750	2				



50 AMP Right Angle Power Supply Cord								c (UL) us
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type	POWER RATING AMPS WATTS	PACK QTY
16-00563	30ft	6/3-8/1	STW	Black	1	14-50	50 12500	2





30 AMP	30 AMP Right Angle Male and Female Pigtail								s (ÎL) ns
ITEM PN#	CORD Length	WIRE Gauge	WIRE Type	WIRE Color	OUTLETS	PLUG Type		R RATING Watts	PACK QTY
16-00564	18in	10/3	STW	Black	1	TT-30 Male	30	3750	10
16-00565	18in	10/3	STW	Black	1	TT-30 Female	30	3750	10



Flexon Hose - Not Just Lawn and Garden

For over 60 years, Flexon hose has maintained a standard of quality, performance and durability in ALL lines of hoses. Flexon carries a wide range of hoses suited for homeowners all the way up to professional contractors. We also carry a wide range of specialty items including COMMERCIAL GRADE performance and durability. We have a hose for you and MADE TO LAST!

Flextreme Ultimate Hose

Flextreme Ultimate-Maximum Flexibility All Year-Round							
ITEM PN# LENGTH I.D HOSE WARRANTY PACK DIM COLOR LENGTH QTY							
FLXT5850-0	50ft	5/8"		Green	25	4	
FLXT58100-0	100ft	5/8"		Green	25	2	
• Kink-Free Construction • Machined Crush Proof Couplings							
Forever Flow	Forever Flow						





Contractor Grade Rubber & Vinyl Hose

Superior Strength in Toughest Applications

Contractor Grade Rubber & Vinyl						
ITEM PN#	LENGTH	I.D DIM	PLY	HOSE Color	WARRANTY LENGTH	PACK QTY
CG5850	50ft	5/8"	6	Gray	Lifetime	5
CG58100	100ft	5/8"	6	Gray	Lifetime	3
Brass Crushproof C	ouplings		Scuff-Proof Outer Jacket			
• High Burst Strength • Ideal for Commercial Use						







Professional Rubber & Vinyl Hose



Professional	Rubber	& Vinyl				
ITEM PN#	LENGTH	I.D DIM	PLY	HOSE Color	WARRANTY LENGTH	PACK QTY
CX5850	50ft	5/8"	5	Peach	10 Year	5
CX5875	75ft	5/8"	5	Peach	10 Year	3
CX3450	50ft	3/4"	5	Peach	10 Year	5
CX3475	75ft	3/4"	5	Peach	10 Year	3
CX34100	100ft	3/4"	5	Peach	10 Year	2
- Dadial Dadala Daia	f		- NA I- !	C	C 1!	

- Radial Double Reinforcement Machine Crushproof Couplings
- Superior Burst Strength • Commercial Grade Performance & Durability

Commercial Premium Rubber Hose

Tough Under Rugged Conditions



Black Premium Rubber - Tough Under Rugged Conditions						
ITEM PN#	LENGTH	I.D Dim	PLY	HOSE Color	WARRANTY LENGTH	PACK QTY
PH5825	25ft	5/8"	3	Black/Red/Green	10 Year	5
PH5850	50ft	5/8"	3	Black/Red/Green	10 Year	5
PH5875	75ft	5/8"	3	Black/Red/Green	10 Year	3
PH58100	100ft	5/8"	3	Black/Red/Green	10 Year	3
Hot Water Sa	• Hot Water Safe • HEX Couplings					
High Burst Strength Ideal for commercial use						

Hot Water Premium Rubber Hose



Hot Water Premium Rubber						
ITEM PN#	LENGTH	I.D Dim	PLY	HOSE Color	WARRANTY Length	PACK QTY
FAR3450	50ft	3/4"	3	Red	10 Year	3
• 3/4" for greater water flow • Stays Flexible in Cold Temperatures						
Withstands Hot Wa	Withstands Hot Water up to 180°F					

Medium Duty Hose

The Best Choice for Trouble-Free Watering



Weather-Be	Weather-Beater						
ITEM PN#	LENGTH	I.D DIM	PLY	HOSE Color	WARRANTY Length	PACK QTY	
WB5850	50ft	5/8"	5	Green	10 Year	5	
WB5875	75ft	5/8"	5	Green	10 Year	3	
WB58100	100ft	5/8"	5	Green	10 Year	3	
Radial Belted			FLEX-GUARD Hose Protector				
Heavy Duty Coupling			Double Reinforced				





Replacement Parts

Work Light Replacement Parts					
ITEM PN#		PACK QTY			
08-00286	Metal Replacement Bulb Guard	12			
08-00287	Industrial Metal Replacement Bulb Guard	12			
08-00290	Trouble Light Replacement Head w/ Metal Cage	6			
08-00401	Replacement Wire Guard for 400W Metal Halide	1			







10 Watt LED Bulb							
ITEM PN#	DESCRIPTION	CALVIN RATING	LUMENS	LAMPLIFE (HRS)	PACK QTY		
08-00025	LED "A19"	6500K	850	35,000	1		



Replacement Bulbs					
ITEM PN#		BULB RATING	PACK QTY		
7760	Rough Service "A" Bulb	75W	2/10		
7759	Rough Service "A" Bulb	100W	2/10		
PL13/41	Compact Fluorescent Bulb - 65K	13W	20/200		
08-00802	200W Halogen Bulb	200W	10		
Q500T3/CL	500W Halogen Bulb	500W	25/250		
Q250T3/CL	250W Halogen Bulb	250W	25/250		
2845	400W Metal Halide Bulb Pulse Start	400W	1/6		
08-00631	6-Pack 500W Halogen Bulbs	500W	12/72		









Batter	Battery and Charger Replacement						
PN#	DESCRIPTION	PACK QTY					
08-01717	08-00717 Lithium Rechargeable Battery	1					
08-02717	08-00717 Replacement Charger	1					

ETTEGRIP 2	Pack Replacement Handle	
16-00548	Yellow Replacement Handle for 30AMP	5/50
16-00549	Yellow Replacement Handle for 50AMP	5/50







NEMA Chart

	VOLTAGE	LINIE!	15 AN	MPERE	20 AN	/IPERE	30 AN	MPERE	50 AN	/IPERE	60 AN	APERE
	VULIAGE	LINE#	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG
2 Pole,	125V	1	1-15R	1-15P								
2 Pole, 2 Wire	250V	2	2-15R	2-15P	2-20R	2-20P	2-30R	2-30P				
	VOLTAGE	LINE#	15 AN	MPERE	20 AN	NPERE	30 AN	MPERE	50 AN	NPERE	60 AN	MPERE
	VULIAGE	LINE#	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG
	125V	5	a	(Ti)	•		0	(Ti)	a	(Ti)		

	n 1
2	Pole,
3	Wire,
G	rounding

VOLTAGE	LINE#	15 AN	NPERE	20 AN	/IPERE	30 AN	NPERE	50 AN	/IPERE	60 AN	/IPERE
VULINUL	LINE#	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG
125V	5	5-15R	5-15P	5-20R	5-20P	5-30R	5-30P	5-50R	5-50P		
250V	6	6-15R	6-15P	6-20R	6-20P	6-30R	6-30P	6-50R	6-50P		
277V	7	7-15R	7-15P	7-20R	7-20P	7-30R	7-30P	7-50R	7-50P		

3 Pole, 3 Wire

VOLTAGE	LINE	15 AI	MPERE	20 AI	MPERE	30 AI	MPERE	50 AI	MPERE	60 AI	MPERE
VULINUL	LINE#	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG
125V/250V	10			10-20R	10-20P	10-30R	10-30P	10-50R	10-50P		
3¢∆250V	11	11-15R	11-15P	11-20R	11-20P	11-30R	11-30P	11-50R	11-50P		

3 Pole, 3 Wire, Grounding

VOLTAGE	LIBIE!	15 AN	MPERE	20 AI	MPERE	30 AI	MPERE	50 AI	MPERE	60 AI	MPERE
VULINUL	LINE#	CONNECTOR	PLUG								
125V/250V	14	14-15R	14-15P	14-20R	14-20P	14-30R	14-30P	14-50R	14-50P	14-60R	14-60P
3∳∆250V	15	15-15R	15-15P	15-20P	15-20P	15-30R	15-30P	15-50R	15-50P	15-60R	15-60P

4 Pole, 4 Wire

VOITAGE	LINE	15 AN	APERE .	20 AN	APERE .	30 AN	APERE .	50 AN	MPERE	60 AT	APERE
VULIAUL	LINE#	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG
3ΦY 120/208V	18	18-15R	18-15P	18-20R	18-20P	18-30R	18-30P	18-50R	18-50P	18-60R	18-60P

Locking Plugs and Receptacles

VOLTAGE	LIBIE!	15 AN	NPERE	20 AN	/IPERE	30 AN	ЛРЕRE	50 AI	MPERE	60 AI	MPERE
VULINAL	LINE#	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG
125V	L1	L1-15R	L1-15P								
250V	L2			L2-20R	L2-20P						
125V	L5	L5-15R	L5-15P	£5-20R	L5-20P	L5-30R	L5-30P				
250V	L6	L6-15R	L6-15P	L6-20R	L6-20P	L6-30R	L6-30P				
277V, A.C.	L7	L7-15R	L7-15P	L7-20R	L7-20P	L7-30R	L7-30P				
480V	L8			L8-20R	L8-20P	L8-30R	L8-30P				
600V	L9			L9-20R	L9-20P	L9-30R	L9-30P				
125V/250V	L14			L14-20R	L14-20P	L14-30R	L14-30P				



Glossary

Conductor Color Codes

Function	NA - North America (US/Canada)	IEC - International
L = Line (Hot)	Black	Brown
N = Neutral	White	Light Blue
E = Earth (Ground)	Green or Green/Yellow	Green/Yellow
4th Conductor	Red	-
5th Conductor	Yellow	-
6th Conductor	Orange	-

Technical Data

Full Load Current Values

Current Values Based on Usual Speed and Normal Torque

For full load currents of 206V and 200V motors, increase corresponding 220V value above by 6% and 10% respectively.

.252.9 Amps 5.8 Amps	Motor Horse Powe AC	Direct	tor Voltage Singlo Phase		e-Phase Dii		gle- Thro	<u>V</u> ee-Phase duction)
.25 5.2 9.8 4.0 Amps 2.6 4.9 2.0 Amps 3.4 7.4 13.8 5.6 3.7 6.9 2.8 1 9.4 16.0 7.2 4.7 8.0 3.6 1.5 13.2 20.0 10.4 6.6 10.0 5.2 2 17.0 24.0 13.6 8.5 12.0 6.8 3 25.0 34.0 - 12.2 17.0 9.6 5 40.0 56.0 - 20.0 28.0 15.2 7.5 58.0 80.0 - 29.0 40.0 22.0	.252	.9 Amps 5.	8 Amps	-	1.5 Amps	2.9 Amps	-	
3.4 7.4 13.8 5.6 3.7 6.9 2.8 1 9.4 16.0 7.2 4.7 8.0 3.6 1.5 13.2 20.0 10.4 6.6 10.0 5.2 2 17.0 24.0 13.6 8.5 12.0 6.8 3 25.0 34.0 - 12.2 17.0 9.6 5 40.0 56.0 - 20.0 28.0 15.2 7.5 58.0 80.0 - 29.0 40.0 22.0	.33	3.6	7.2	-	1.8	3.5	-	
1 9.4 16.0 7.2 4.7 8.0 3.6 1.5 13.2 20.0 10.4 6.6 10.0 5.2 2 17.0 24.0 13.6 8.5 12.0 6.8 3 25.0 34.0 - 12.2 17.0 9.6 5 40.0 56.0 - 20.0 28.0 15.2 7.5 58.0 80.0 - 29.0 40.0 22.0	.25	5.2	9.8	4.0 Amps	2.6	4.9	2.0 Amps	
1.5 13.2 20.0 10.4 6.6 10.0 5.2 2 17.0 24.0 13.6 8.5 12.0 6.8 3 25.0 34.0 - 12.2 17.0 9.6 5 40.0 56.0 - 20.0 28.0 15.2 7.5 58.0 80.0 - 29.0 40.0 22.0	3.4	7.4	13.8	5.6	3.7	6.9	2.8	
2 17.0 24.0 13.6 8.5 12.0 6.8 3 25.0 34.0 - 12.2 17.0 9.6 5 40.0 56.0 - 20.0 28.0 15.2 7.5 58.0 80.0 - 29.0 40.0 22.0	1	9.4	16.0	7.2	4.7	8.0	3.6	
3 25.0 34.0 - 12.2 17.0 9.6 5 40.0 56.0 - 20.0 28.0 15.2 7.5 58.0 80.0 - 29.0 40.0 22.0	1.5	13.2	20.0	10.4	6.6	10.0	5.2	
5 40.0 56.0 - 20.0 28.0 15.2 7.5 58.0 80.0 - 29.0 40.0 22.0	2	17.0	24.0	13.6	8.5	12.0	6.8	
7.5 58.0 80.0 - 29.0 40.0 22.0	3	25.0	34.0	-	12.2	17.0	9.6	
	5	40.0	56.0	-	20.0	28.0	15.2	
10 76.0 100.0 - 38.0 50.0 28.0	7.5	58.0	80.0	-	29.0	40.0	22.0	
	10	76.0	100.0	-	38.0	50.0	28.0	

Current Carrying Capacity of Flexible Cords

Based on Ambient Temperature of 30°C (86°F)

Amperage shown is for not more than three conductors in a cord. If cord has from four to six conductors, decrease the values shown.

†The ampacities under subheading A are applicable to three-conductor cords and four-conductor cords with three conductors carrying current. The ampacities under subheading B are applicable to two-conductor cords and three-conductor cords with two conductors carrying current.

NOTE: On extension cords over 50 feet, derate by two wire sizes.

10	76.0	100.0	-	38.0	50.0	28.0
AWG Wire Size			astic Types SJT, SJTO O, SPT		Types HPD, HP HSO	N, HSJ
		A†		В†		
18		7 Amps	10 An	nps	10 Amps	
17		-		-	12	
16		10		13	15	
14		15		18	20	
12		20		25	30	
10		25		30	35	
8		35		40	-	
 6		45		55	-	





Glossary

Amperage Ratings for Metric Copper

*General use ratings only. Check with appropriate approval agency for specific applications, as ratings vary from country to country.

Copper Size mm3	ETSA	Western European*	
0.50	3.0 Amps	6.0 Amps	
0.75	7.5	10.0	
1.00	10.0	12.0	
1.50	15.0	16.0	
2.50	20.0	20.0	

Glossary of Terms

AWG	Abbreviation for American Wire Gauge.	Capacitance	The ability of a dielectric material between conductors to store electricity when a dif-
AWM	Designation for appliance wiring material.		ference of potential exists between the conductors. The unit of measurement is
Alternating Current	Electric current that continually reverses its direction. It is expressed in cycles per second (hertz of Hz).		the farad, which is the capacitance value that will store a charge of one coulomb when a one-volt potential difference exists between the conductors. In AC, one farad
Ambient Temperature	The temperature of a medium (gas or liquid) surrounding the object.		is the capacitance value that will permit one ampere of current when the voltage across the capacitor changes at a rate of one volt per second.
American Wire Gauge (AWG) Ampacity	A standard system for designating wire diameter. Also referred to as the Brown and Sharpe (B&S) wire gauge. (See Current Carrying Capacity).	Circuit (Electric)	The complete path of an electrical current. When the continuity is broken, it is called an open circuit; when continuity
• •			is maintained, it is called a closed circuit.
Ampere	The unit of current. One ampere is the current flowing through one ohm of resistance at one volt potential.	Clamp	To hold the current or voltage at a specific fixed level.
Anneal	Relief of mechanical stress through heat and gradual cooling. Annealing copper renders it less brittle.	Cold Flow	Permanent deformation of the insulation due to mechanical force or pressure (not due to heat softening).
Audio Frequency	the range of frequencies audible to the human ear. Usually 20-20,000 Hz.	Color Code	A system for circuit identification through use of solid colors and contrasting tracers.
Basic Protection	A commonly used industry term for partial surge protection, usually a single	Compound	An insulating or jacketing material made by mixing two or more ingredients.
	MOV protecting line-to-neutral (see Full Protection).	Concentricity	In a wire or cable, the measurement of the location of the center of the conduc-
Braid	A fibrous or metallic group of filaments interwoven in cylindrical form to form a covering over one or more wires.		tor with respect to the geometric center of the surrounding insulation.
Breakdown	The voltage at which the insulation between conductors breaks down.	Conductor	An insulated wire suitable for carrying electrical current.
Voltage Bunch Stranding	A group of wires of the same diameter twisted together without a predetermined pattern.	Contacts	The parts of the connector that actually carry the electrical current, and are touched together or separated to control the flow.
Cabling	The twisting together of two or more insulated conductors to form a cable.		





Glossary of Terms

Glossary

Continuity Check A test to determine whether electrical

current flows continuously throughout the length of a single wire or individual

wires in a cable.

A flexible insulated wire. Cord

Corona Ionization of air surrounding a conductor

caused by the influence of high voltage. Causes deteriorization of insulation materi-

als.

The minute cracks on the surface of plastic Crazing

materials.

CSA Abbreviation for Canadian Standards Asso-

> ciation, a non-profit, independent organization that operates a listing service for electrical and electronic materials and equipment. The Canadian counterpart of

the Underwriters Laboratories.

Current Carrying

Capacity

The maximum current an insulated conductor can safely carry without exceed-

ing its insulation and jacket temperature

limitations.

Dielectric Strength The voltage that an insulation can with-

stand before breakdown occurs. Usually expressed as a voltage gradient (such as

volts per mil).

Direct Capacitance The capacitance measured directly from

conductor to conductor through a single

insulating layer.

Direct Current An electric current that flows in only one

direction.

Drain Wire In a cable, the uninsulated wire laid over

the component or components and used

as a ground connection.

Drawing In wire manufacture, pulling metal through

a die or series of dies to reduce diameter

to a specified size.

Electromagnetic Unwanted signals picked up and transmit-

ted over electrical lines, caused by varying

magnetic fields.

Eccentricity Like concentricity, a measure of the center

> of a conductor's location with respect to the circular cross-section of the insulation. Expressed as a percentage of displacement

of one circle within the other.

Elongation The fractional increase in length of a

material stressed in tension.

Energy Capacity The heat absorption capacity to absorb

electrically generated heat, expressed in

joules, or watt-seconds.

Filler (1) A material used in multiconductor

> cables to occupy large interstices formed by the assembled conductors. (2) An inert substance added to a compound to improve properties or decrease cost.

Flame Resistance The ability of a material not to propagate

flame once the heat source is removed.

Flex Life The measurement of the ability of a con-

ductor or cable to withstand repeated

bending.

Frequency The number of times an alternating cur-

rent repeats its cycle in one second. (See

Gauge A term used to denote the physical size

of a wire.

Ground An electrical term meaning to connect

> to the earth or other large conducting body to serve as an earth, thus making a

complete electrical circuit.

HPN Parallel heater cord, typically neoprene-

type insulation.

Harness An arrangement of wires and cables,

usually with many breakouts, which have been tied together or pulled into a rubber or plastic sheath, used to interconnect an

electrical circuit.

Hertz (Hz) A term replacing cycles per second as an

indication of frequency.

High Potential A test designed to check the integrity of

a conductor's insulation by applying a

specified high voltage.

Hybrid Circuit A surge suppressor that uses a combination

> of two or more types of electronic devious to provide additional or multi-stage surge protection (most surge protection use only

MOVs).

Abbreviation for hertz. Hz

Impedance The total opposition that a circuit offers to

the flow of alternating current or any other varying current at a particular frequency. It is a combination of resistance R and

reactance X, measured in ohms.



COMPARE QUALITY

Glossary

Glossary of Terms

Inductance The property of a circuit or circuit element Primary Insulation The first layer of non-conductive material that opposes a change in current flow, applied over a conductor, whose prime thus causing current changes to lag behind function is to act as electrical insulation. voltage changes. It is measured in henrys. Packaging of finished wire or cable. Put-Up A material having high resistance to the Insulation flow of electric current. Often called a **Rated Voltage** The maximum voltage at which an electridielectric in radio frequency cable. cal component can operate for extended periods without undue degradation or Jacket An outer non-metallic protective covering safety hazard. applied over an insulated wire or cable. Resistance A measure of the difficulty in moving electrical current through a medium when Jumper Cable A short flat cable inter-connecting two voltage is applied, measured in ohms. wiring boards or devices. The length measured along the axis of a S Heavy-duty, rubber-insulated portable cord. Lay wire or cable required for a single strand Stranded copper conductors with separator (in stranded wire) or conductor (in cable) and individual rubber insulation. Two or to make one complete turn about the axis more color-coded conductors cabled with of the conductor or cable. filler, wrapped with separator and rubber jacketed overall. 600 V. Longitudinal A tape shield, flat or corrugated, applied Shield longitudinally with the axis of the core **SEOW** Thermoplastic elastomer (TPE) insulated being shielded. conductors. Water flame, oil, abrasion, ultraviolet resistant for outdoor use. L-N An abbreviation for line-to-neutral, the Junior hard service, rubber-insulated location for the most common type of SJ pendant or portable cord. Same construcpower surge (see Full Protection). tion as type S, but 300 V. Jacket thickness smaller. MTW Thermoplastic insulated machine tool wire. Multiconductor More than one conductor within a single **SJEOW** Same as SJ, with Thermoplastic elastomer (TPE) jacket and insulated conductors. cable complex. Water, flame, oil, abrasion, ultraviolet resistant for outdoor use. Mylar A synthetic compound with high dielectric qualities made by Du-pont® and used **SJEOOW** extensively in the wire and cable industry. Same as SJEOW, but with oil resistant inner and outer jacketing. Noise A term for unwanted electrical signals on Same as SJ, but neoprene, oil-resistant SIO the power line. compound outer jacket. Can also be made "water resistant". 300 V, 60°C, 75°C, or **Noise Filter** An electronic component, usually a capacitor, designed to minimize unwanted electrical signals. SJOOW All rubber, oil, water, flame, abrasion Ohm A unit of electrical resistance resistant in/out jacket. 300 V, -40°C to 90°C. **Peak Current** Another term for energy capacity. SIT Junior hard service thermoplastic insulated conductors with overall thermoplastic One trillionth of a second. Picosecond jacket, 300 V, 60°C, 75°C, or 90°C. Indoor **Plasticizer** A chemical agent added to plastics to make them softer and more pliable. **SJTO** Same as SJT, but oil-resistant thermoplastic outer jacket. **Potting** The sealing of a cable termination or other component with a liquid that thermosets **SJTW** Same as SJT, but outdoor water-resistant into an elastomer. outer jacket.





Glossary

Glossary of Terms

soow	Hard service cord. Same construction as type S, except thicker oil-resistant neoprene jacket. 600 V, 60°C to 90°C. All rubber, oil, water, flame, abrasion resistant indoor/outdoor jacket. 600 V, -40°C to 90°C.	Shield	A sheet, screen, or braid of metal, usually copper, aluminum, or other conducting material, placed around or between electric circuits or cables or their components to contain any unwanted radiation, or to keep out any unwanted interference.
SP-1	All rubber, parallel-jacketed, two-conductor light-duty cord for pendant or portable use. 300 V.	Spacing	Distance between the closest edges of two adjacent conductors.
SP-2	Same as SP-1, but heavier construction, with or without a third conductor for grounding purposes. 300 V.	Spark Test	A test designed to locate pin-holes in the insulation of a wire or cable by application of high voltage for a very short period of time while the wire is being drawn through the electrode field.
SP-3	Same as SP-2, but heavier construction for refrigerators or room air conditioners. 300 V.	Spiral Wrap	The helical wrap of a tape over a core.
		Strand	A single uninsulated wire.
SPT-1	Same as SP-1, except all-thermoplastic. 300 V. With or without third conductor for grounding.	Stranded Conductor	A conductor composed of groups of wires twisted together.
SPT-2	Same as SP-2, except all-thermoplastic. 300 V. With or without third conductor for grounding.	Tensile Strength	The pull stress required to break a given specimen.
SPT-3	Same as SP-3, except all-thermoplastic. 300 V. With or without third conductor for grounding.	Thermoplastic	A material that softens when heated and becomes firm on cooling. Example: PVC (plastic).
ST	Hard service cord, jacketed. Same as type S, except all-plastic construction. 600 V, 60°C to 105°C.	Thermoset	A material that hardens or sets when heat is applied and that, once set, cannot be resoftened by heating. The application of heat is called "curing." Example: rubber.
STO	Same as ST, but with oil-resistant thermo- plastic outer jacket. 600 V, 60°C to 105°C.	UL	Abbreviation for Underwriters Laboratories, a non-profit independent organization that operates a listing service for electrical and
STW			and a second and a second and a second
3111	Same as ST, but indoor/outdoor water-		electronic materials and equipment.
SVT	Same as ST, but indoor/outdoor water- resistant outer jacket. All plastic construction. Light-duty vacuum cleaner cord. With or without third con-	UL 497A	The UL standard covering the basis for UL listing of surge controls for phone lines.

Separator

Pertaining to wire and cable, a layer of insulating material such as textile, paper, mylar, etc., which is placed between a conductor and its dielectric, between a cable jacket and the components it covers, or between various components of a multiple-conductor cable. It can be utilized to improve stripped qualities, roundness, and/or flexibility, or can offer additional mechanical or electrical protection to the components it separates.


Voltage

The term most often used in place of electromotive force, potential, potential difference, or voltage drop to designate the electrical pressure that exists between two points and is capable of producing a current when a closed circuit is connected between two points.

VW-1

A flammability rating established by Underwriters Laboratories for wires and cables that pass a specially designed vertical flame test, formerly designated FR-1. Typically used for individual conductors or paralled-type constructions.





Thermal Plastic Housing						
VOLTEC PN#	BRYANT PN#	MARINCO PN#	LEVITON PN#			
12-00244B	5965B					
12-00245B	5969B					

Rubber Wet Guard® Housing				
VOLTEC PN#	BRYANT PN#	MARINCO PN#	LEVITON PN#	
12-00344L			0138SO-2878	
12-00345L			0B39SO-2865	

Nylon Plu	gs		
VOLTEC PN#	BRYANT PN#	MARINCO PN#	LEVITON PN#
12-00225	5266N	5266	061-5266-00C
12-00227	5366NP	5366	061-5366-00C
12-00229	70520NP	205P	061-02311-000
12-00231	70620NP	206P	061-02321-000
12-00233	70530NP	305P	061-02611-000
12-00235	70630NP	306P	061-02621-000
12-00237	71420NP	2014P	061-02411-000
12-00239	71430NP	3014P	061-02711-000
12-00242		CS6365N	
12-00242V			
12-00244YL			000-515PV-000 Yellow
12-00244BL			000-515PV-000

Nylon Connectors						
VOLTEC PN#	BRYANT PN#	MARINCO PN#	LEVITON PN#			
12-00224	9755N		000-115PR			
12-00226	5269NC	5269	061-05269-00C			
12-00228	5369NC	5369	061-05369-00C			
12-00230	70520NC	205C	065-02313-000			
12-00232	70620NC	206C	065-02323-000			
12-00234	70530NC	305C	165-02613-000			
12-00236	70630NC	306C	165-C2623-000			
12-00238	71420NC	2014C	165-02413-000			
12-00240	71430NC	3014C	165-02713-000			
12-00243		CS6364N				
12-00243V						
12-00245YL			000-515CV-000 Yellow			
12-00245BL			000-515CV-000			





Corporate Office and Satellite Warehouse Locations:

Corporate Office 13885 Ramona Ave Chino, CA 91710 Office: 909-606-1991

Fax: 909-606-0281 Toll Free: 866-4VOLTEC (486-5832)

US Wire / Flexon 33 Queen Street Newark, NJ 07114 Office: 973.824.5530/ 1.800.327.4673

Fax: 973.824.1208

Construction Product Sales 1814 Beach St Broadview, IL 60155 Office: 800-837-2771

Fax: 800-837-1329

Christy and Associates 2412 Lynx Lane Orlando, FL 32804 Office: 407-896-1800 Fax: 407-895-0046

Construction Agents Northwest 177 South Orcas Seattle, WA 98108 Office: 206-762-5450

Fax: 206-767-6804

Burrus & Matthews, Inc. 3800 Mcilhenny Houston, Texas 77004 Office: 713-659-3511 Fax: 713-659-2176







Warranty



Limited Lifetime Warranty:

For the lifetime of this product, if it fails due to a manufacturing defect, return it to Voltec for a free replacement. This warranty is limited to the replacement of the product only and no other warranty, liability or responsibility is implied or expressed.



Limited Warranty:

If the product fails during the 1 year warranty period due to a manufacturing defect, return it to Voltec for a free replacement. This warranty is limited to the replacement of the product only and no other warranty, liability or responsibility is implied or expressed.

Returns and Shipping Policy

Return Goods Authorization (RGA):

If the product fails during the warranty period, due to a manufacturing defect, return it to Voltec for a free replacement. This warranty is limited to the replacement of the product only and no other warranty, liability or responsibility is implied or expressed. Before returning any item to Voltec, an RGA number must be obtained directly from Voltec. Any item returned to Voltec without an RGA number will not be inspected and will be sent back to the original sender. Once an RGA is received, the item will be inspected, and if the item is deemed to be a manufacturing defect, a replacement will be sent to the customer on behalf of Voltec. If an RGA is received and deemed to be customer abuse, and not a manufacturing defect, this item will be sent back the customer at the customer's expense.

Shipping Policy:

Voltec's prepaid freight policy applies only to continental US addresses. All prepaid orders will be sent out at Voltec's discretion either using UPS ground or any major trucking line's. Purchase orders that do not reach Voltec's prepaid minimum will be charged to the customers account. For any freight prepay and add orders, Voltec will only be responsible for shipping UPS ground. If the customer requires an expedited service, or something other than UPS Ground, then the customer will have to provide their courier account number.





Index of Parts

Item No.	Page No.	Pack Qty.	MasterCarton Weight	UPC# 8-03058-
01-00001	20	25	8.82	00001-1
01-00002	20	25	8.82	00002-8
01-00003	20	25	11.46	00003-5
01-00004	20	25	11.46	00004-2
01-00005	20	25	14.33	00005-9
01-00006	20	25	14.33	00006-6
01-00007	20	25	16.53	00007-3
01-00008	20	25	16.53	0-80000
01-00012	20	25	22.05	00012-7
01-00013	20	25	22.05	00013-4
01-00015	20	25	39.46	00015-8
01-00016	20	25	39.46	00016-5
01-00041	23	18	19.85	00041-7
02-00034	20	24	24.26	00034-9
02-00037	20	12	30.21	00037-0
03-00045	21	25	11	00045-5
03-00047	21	25	11	00047-9
03-00048	21	20	48	00048-6
03-00049	23	25	7.5	00049-3
03-00050	23	25	14.55	00050-9
03-00051	23	25	19.4	00051-6
03-00052	23	25	7.72	00052-3
03-00054	23	25	14.77	00054-7
03-00055	23	25	19.84	00055-4
03-00059	21	12	46	00059-2
03-00060	21	25	22	00060-8
03-00062	21	25	22	00062-2
03-00063	21	6	37	00063-9
03-00064	21	25	23	00064-6
03-00065	21	6	37	00065-3
03-00066	21	24	38	00066-0
03-00067	22	12	15.88	00067-7
03-00069	22	12	20.73	00069-1
03-00070	22	12	18.07	00070-7
03-00072	22	12	24.24	00072-1
03-00073	22	12	22.05	00073-8
03-00075	22	12	29.99	00075-2
03-00076	22	12	22.27	00076-9
03-00078	22	12	26.46	00078-3
03-00079	22	12	22.75	00079-0
03-00081	22	12	30.64	00081-3
03-00082	22	12	30.86	00082-0
03-00084	22	12	43.42	00084-4
03-00447	21	6	24	00547-4
04-00085	14	25	4.5	00085-1
04-00087	14	25	4.5	00087-5
04-00088	13	6	14	00088-2
04-00090	13	6	5.1	00090-5
04-00091	13	6	5.1	00091-2
04-00092	14	10	5.73	00092-9
04-0092G	15	6	8.6	01092-5
04-0092N	14	10	5	00492-7
04-00093	14	10	5.73	00093-6
04-0093G	15	6	8.5	01093-2
04-0093N	14	10	5	00493-4
04-00931	13	12	21	00094-3
04-00095	13	12	30	00094-3
04-00095	13	12	18.96	00095-0
04-00096	13	12	25.36	00096-7
04-00097	10	14	۷۵.۵۵	00097-4

Item No.	Page No.	Pack Qty.	MasterCarton Weight	UPC# 8-03058-
04-00101	15	6	6.61	00101-8
04-00102	15	6	11	00102-5
04-00103	15	6	10	00103-2
04-00104	15	6	10	00104-9
04-00105	15	6	9	01105-5
04-00106	15	6		01106-2
04-00107	16	4		01107-6
04-00108	16	4		01108-3
04-00200	14	12	18.96	01000-3
04-00201	14	12	18.96	01001-0
04-00214	6, 14	4		01214-4
04-00215	6, 14	4		01215-1
04-00216	6, 14	4		01216-8
04-00217	6, 14	4		01217-5
04-00491	6, 13	6	4.45	00491-0
05-00105	7	12	43	00105-6
05-00106	7	4	26.9	00106-3
05-00107	7	2	26.9	00107-0
05-00108	7	12	24.7	00108-7
05-00109	7	12	44.98	00109-4
05-00110	7	6	48.95	00110-0
05-00111	7	12	1653	00111-7
05-00112	7	6	30.64	00112-4
05-00113	7	3	29.75	00113-1
05-00114	8	4	26.9	00114-8
05-00115	8	4	26.9	00115-5
05-00116	8	2	26.9	00116-2
05-00117	8	2	26.9	00117-9
05-00118	7	1	12	00118-6
05-00119	7	1	24	00119-3
05-00120	7	12	34.18	00120-9
05-00121	7	6	33.08	00121-6
05-00122	7	4	44.1	00122-3
05-00123	7	8	29.5	00123-0
05-00124	7	4	28.21	00124-7
05-00125	7	2	26.45	00125-4
05-00127	8	4	26.9	00127-8
05-00128	8	4	26.9	00128-5
05-00129	8	2	26.9	00129-2
05-00130	8	2	26.9	00130-8
05-00131	8	2	26.9	00131-5
05-00147	10	8	28	00147-6
05-00148	10	4	26	00148-3
05-00149	10	2	26.66	00149-0
05-00152	8	4	26.9	00152-0
05-00153	8	2	26.9	00153-7
05-00158	8	4	30	00158-2
05-00159	8	2	29	00159-9
05-00160	8	2	30	00160-5
05-00231	9	2	27	00367-8
05-00333	8	1	13	00333-3
05-00341	7	12	15	00370-8
05-00342	7	6	30	00371-5
05-00343	7	3	30	00373-9
05-00347	8	12	47	00447-7
05-00348	8	4	30	00348-7
05-00349	8	2	29	00349-4
05-00350	7	1	12.5	00350-0
05-00351	7	1	24.05	00351-7







Item No.	Page No.	Pack Qty.	MasterCarton Weight	UPC# 8-03058-
05-00364	7	12	43	00364-7
05-00365	7	4	26.9	00365-4
05-00366	7	2	26.9	00666-2
06-00162	10	4	41.45	00162-9
06-00163	10	2	39.89	00163-6
06-00167	10	2	39.89	00167-4
06-00168	10	2	39.89	00168-1
06-00180	10	1	28	00680-8
06-00181	10	1	28	00681-5
07-00244	29	4		01244-1
07-00245	29	4		01245-8
07-00249	34	4	45.97	00249-7
07-00250	34	2	36	00250-3
07-00253	31	4	44	00253-4
07-00254	31	2	37	00254-1
07-00260	28	2	37	01260-1
07-00282	24	4	38.9	00282-4
07-00283	24	2	31.38	00283-1
07-00284	24	2	34.92	00284-8
08-00025	43	1/50		00000-?
08-00181	30	4	17.63	00181-0
08-00183	30	4	17.28	00183-4
08-00184	30	4	20.94	00184-1
08-00185	30	6	28.65	00185-8
08-00187	18	1		00187-2
08-00188	18	1		00188-9
08-00189	18	1	9.48	00189-6
08-00190	18	1	17.42	00190-2
08-00191	18	1	25.35	00191-9
08-00192	18	1	25.35	00192-4
08-00193	18	1	13.89	00193-3
08-00194	18	1	25.35	00194-0
08-00197	18	1	14.99	00197-1
08-00198	18	1	25.36	00198-8
08-00199	18	1	14.99	00199-5
08-00200	18	1	28	00200-8
08-00202	18	1	28	00202-2
08-00203	18	20	4.85	00203-9
08-00204	18	20	7.27	00204-6
08-00207	32	4	12.35	00207-7
08-00209	33	4	14.5	00209-1
08-00210	34	2	19	00210-7
08-00211	33	2	28	00211-4
08-00219	33	6	28	00219-0
08-00256	30	4	7.96	00256-5
08-00257	30	4	13.7	00257-2
08-00258	30	6	22.76	00258-9
08-00264	32	6	12.16	00264-0
08-00268	33	6	22.76	00268-8
08-00270	33	6	23.21	00270-1
08-00286	43	12	4.42	00286-2
08-00287	43	12	9.28	00287-9
08-00290	43	6	11.27	00290-9
08-00382	30	6	30.21	00382-1
08-00400	17	1	21.45	01400-1
08-00401	43	1	2.6	01401-8
08-00403	17	2		01403-9
08-00404	17	2		01404-9
08-00431	36	12		01436-
08-00432	35	4		01432-2

Item	Page	Pack	MasterCarton	UPC#
No.	No.	Qty.	Weight	8-03058-
		,	- 3	
08-00434	35	4		01434-6
08-00435	35	4		01435-3
08-00436	35	4		00000-0
08-00437	36	2		00000-0
08-00438	36	2		00000-0
08-00450	36	4		01450-6
08-00600	28	4		01600-5
08-00609	34	6	24	00609-9
08-00610	33	6	19	00610-5
08-00611	34	2	28	00611-2
08-00617	26	12/48		00617-4
08-00618	26	12/48		00618-1
08-00619	28	12/48	F 7	01619-7
08-00620	26	6	5.7	01620-3
08-00621	27	6	8.85 4	01621-0
08-00622	26	12		01622-7
08-00624	27	6	6.4	01624-1
08-00626	27	6	9.1	01626-5
08-00627	27	6		00627-3
08-00628	27	6		00628-0
08-00631	34	12		00631-0
08-00688	28	4		00688-4
08-00692	26	6		00692-1
08-00693	26	6/30		00693-7
08-00716	29	2		00716-4
08-00717	29			00717-1
08-00718	29	2		00718-8
08-00719	29 29	2		00719-?
08-00720 08-01187	18	1		00720-1 01187-1
08-01187L		<u> </u>		01287-8
08-01188L		1		01287-8
08-01712	43	1/50		01712-5
08-01712	43	1/50		02712-?
09-00214	17	1/30	40	00214-5
09-00215	17	1	80	00214-3
09-00375	16	1	29.5	00375-3
09-0T376	16	1	43.65	00376-0
09-00431	17	.	35	00431-6
09-00432	17	1	70	00432-3
09-00435	17	1	7	00435-4
09-00437	17	2		00437-8
09-00675	16	1	29.5	00675-4
09-0T676	16	1	29.5	00676-1
10-00224	37	6	29	00224-4
10-00273	37	6	25	00273-2
10-00275	37	6	33	00275-6
10-00276	37	2	27.6	00276-3
10-00277	37	4	41.3	00277-0
10-00301	37	12	10.7	00301-2
10-00302	37	12	14.3	00302-9
10-00303	37	12	24	00303-6
10-00307	37	6	28.98	00307-4
10-00320	37	4	72	00320-3
11-00223	20	12	31.967	00223-7
11-00224	20	12	31.967	02224-2
11-00225	20	12	31.967	02225-9
11-00226	20	6	31.967	02226-6
11-00227	20	6	31.967	02227-3
16-00500		10/100	31.68	00500-9





Index of Parts

Item No.	Page No.	e Pack Qty.	MasterCarton Weight	UPC# 8-03058-
16-00501	41	10/100	22.68	00501-6
16-00502	38	10	6.6	00502-3
16-00503	38	10	6.6	00503-0
16-00504	38	10	14.9	00504-7
16-00505	38	10	14.08	00505-4
16-00506	38	10	16	00506-1
16-00507	39	4	19.58	00507-8
16-00508	39	2	14.52	00508-5
16-00509	39	1	15	00509-2
16-00510	39	2	24	00510-8
16-00511	39	1	27	00511-5
16-00516	41	10/50	7	00516-0
16-00517	41	10/50	•	00000-?
16-00526	38	10/30	13	01126-0
16-00548	45	5	4	00548-1
16-00549			•	
	45	5	4.5	00549-5
16-00550	41	10/100	21	00550-4
16-00551	41	10/100	22	00551-1
16-00552	42	10	6.6	00552-8
16-00553	42	10	6.6	00553-5
16-00554	42	10	14.9	00554-2
16-00555	42	10	14.08	00555-9
16-00557	42	4	13	00557-3
16-00558	42	2	14.77	00558-0
16-00559	42	1	14.5	00559-7
16-00561	42	2	24.25	00561-0
16-00562	42	2	72.75	00562-7
16-00563	42	2	35.27	00563-4
16-00564	42	10	5.95	00564-1
16-00565	42	10	5.95	00565-8
16-00566	42	2	79.36	00566-5
16-00568	41	10	8.5	00568-9
16-00569	41	10	8.5	00569-6
16-00570	41	10	15.5	00570-2
16-00571	41	10	9.5	00571-9
16-00578	41	10/50	21	00578-8
16-00579	41	10/50	22	00579-5
16-00580	41	10/50	19.5	00580-1
16-00581	41	10/50	20.5	00581-8
16-00582	41	10/50	34	00582-5
16-00583	41	10/50	37	00583-2
16-00584	39	2	16	00584-9
16-00585	39	2	21	00585-6
16-00586	39	2	39	00586-3
16-00587	39	2	54	00587-0
		2	17	
16-00588	39			00588-7
16-00589	39	2	16.5	00589-4
16-00590	39	10	16.5	00590-0
16-00591	39	10	22	00591-7
16-00592	39	10	13.5	00592-4
16-00593	39	10		00593-1
16-00594	39	10		00594-8
16-00595	39	10		00595-5
16-00596	39	10		00596-2
16-00597	39	10		00597-9
16-001000	40	Sta	ndard Planogram	
16-002000	40	Pre	mium Planogram	

Item No.	Page No.	Pack Qty.	MasterCarton Weight	UPC#
97015	9	16	15	044882-71029-9
97025	9	16	20	044882-71030-5
97050	9	12	36	044882-71031-2
97100	9	6	36	044882-71032-9
98010	9	24	21	044882-71012-1
98015	9	20	26	044882-71014-5
98025	9	16	14	044882-70012-2
98050	9	6	18	044882-70013-9
98100	9	3	18	044882-70014-6
99010	9	24	32	044882-70038-2
99015	9	20	40	044882-70039-9
99025	9	12	39	044882-70017-7
99050	9	4	26	044882-70015-3
99100	9	2	26	044882-70016-0
90050EXT	9	2	22	044882-70050-4
90100EXT	9	1	22	044882-70051-1
98025PB	9	6	14	044882-70023-8
98050PB	9	4	18	044882-70024-5
98100PB	9	2	18	044882-70025-2
99002PB	9	12	12	044882-70018-4
99025PB	9	12	39	044882-70019-1
99050PB	9	4	26	044882-70020-7
99100PB	9	2	26	044882-70021-4

Water Hose Index

Item No.	Page No.	Pack Qty.	MasterCarton Weight	UPC# 0-44882-
FLXT5850-0	43	4	33	044882-30495-5
FLXT58100-0	43	2	32	044882-30497-9
CG5850	43	5	39	044882-44013-4
CG58100	43	3	32	044882-44012-7
CX5850	43	5	40	044882-68042-4
CX5875	43	3	36	044882-68032-5
CX3450	43	5	55	044882-68045-5
CX3475	43	3	45	044882-68046-2
CX34100	43	2	50	044882-68071-4
PH5825	44	5	26	044882-66485-1
PH5850	44	5	47	044882-66486-8
PH5875	44	3	42	044882-66487-5
PH58100	44	3	54	044882-66489-9
FAR3450	44	3	52	044882-67302-0
WB5850	44	5	35	044882-31016-1
WB5875	44	3	39	044882-31018-5
WB58100	44	3	41	044882-31029-1



Order by Phone Monday-Friday, 7 AM to 5 PM PST

Email: customer service@voltec-industries.com

For Complete Resource Visit Our Website

Corporate Office 13885 Ramona Avenue Chino, CA 91710 909.606.1991 tel 909.606.0281 fax

Regional Distribution

Warehouses Chino, California Orlando, Florida Chicago, Illinois Newark, New Jersey Houston, Texas Seattle, Washington





October 2017

